


ePS6-EN54

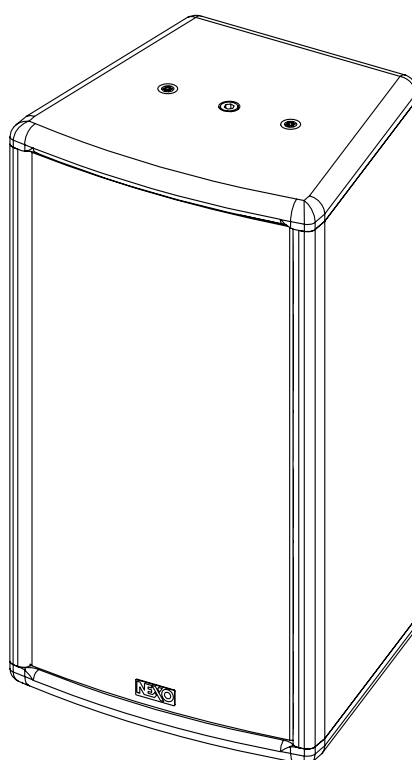

User manual

TABLE OF CONTENTS

TABLE OF CONTENTS 2

COMPLIANCE 3

WARNINGS 4

EQUIPMENT 5

DESCRIPTION 6

PRESET 7

HF DIRECTIVITY 8

CROSSOVER FREQUENCY 8

ACCESSORIES 9

ARRAY EQ 14

MAINTENANCE 15

TECHNICAL SPECIFICATIONS 17

USER NOTES 19

COMPLIANCE

ePS6-EN54 is certified EN54-24 by AFNOR Certification

**NEXO**

Parc du Pré de la Dame Jeanne BP5 - FR 60128 PLAILLY – France

Tel : +33 3 44 99 00 70 – Fax : +33 3 44 99 00 30 – email : info@nexo.fr – nexo-sa.com

EN54-24 :2008

Voice alarm loudspeaker for fire detection and fire alarm systems for buildings

DoP NX-0333-CPR-075633

Type B

Technical data and setup instructions included in this manual

ePS6-EN54

WARNINGS

WARNINGS

PRECAUTIONS

Do not open the speaker, do not try to disassemble it neither to modify it in any way. The system doesn't include any user-repairable part.

If the system seems to be malfunctioning or damaged, stop using it at once and have it repaired by a NEXO qualified technician.

Do not expose the system directly to the sun or to the rain, do not immerse it into fluids, do not place objects filled with liquid on the system. If a liquid gets into the system, please have it inspected by a NEXO qualified technician.

The connection should be performed by qualified technician, by ensuring that power is off.

Operating temperature with temperate climate: 0°C to +40°C (+32°F to +104); -20°C à +60°C (-4°F to +140°F) for storage.

SAFETY INFORMATION

Read this manual before using the speaker.

Keep this manual available for further reference.

Observe all warnings and cautions.

Please check the NEXO Web site nexo-sa.com to get the most up-to-date version of this manual.

Ensure you are aware of the safety rules applying to rigging, stacking or installing on tripod or speaker stand. Failure to observe these rules may expose persons to potential wounds or even death.

Only use the system with accessories specified by NEXO.

Please always consult a NEXO-accredited technician if the installation needs architectural works and observe following precautions:

Mounting Precautions:

- Please select screws and mounting location supporting 4 times the system weight.
- Do not expose the system to excessive dust, vibrations, to extreme cold or hot temperatures, to reduce the risk of damaging components.
- Do not place the system in an unstable position: it could fall accidentally.
- If the system is used on a tripod, please ensure the tripod's specifications are adapted and that its height does not exceed 1.40m/55". Do not move the tripod with the system in position.

Connection and Powering Precautions:

- Unplug connected cables before moving the system.
- Power off the system before connecting the system.
- When switching on the installation, the amplifier must be powered last; when switching the installation off, shut off the amplifier first.
- If you work by cold temperatures, progressively raise the level to nominal value during the first minutes of use, to allow the system components to stabilize.

Please check regularly the system condition.

HIGH SOUND PRESSURE LEVELS

Exposure to very high sound pressure levels may cause permanent hearing losses. Degrees of hearing losses may be different from one person to another, but almost everybody will be affected if exposed to high sound pressure levels during a long period of time. The OSHA (Occupational Safety and Health Administration) American Agency specified the following maximal exposures:

Number of Hours	Sound Pressure Level (dBA), Slow Response
8	90
6	92
4	95
3	97
2	100
1 ½	102
1	105
½	110
¼ or less	115

WASTE OF ELECTRIC OR ELECTRONIC EQUIPMENT





This symbol on the product or its packaging indicates that this product must not be treated as household waste. Instead, it is your responsibility to hand it over to a designated collection point for the recycling of waste electrical and electronic equipment. By ensuring your waste equipment is recycled, you will help prevent potential negative consequences for the environment and human health, which could appear if this product was not recycled. Recycling helps spare natural resources. For more information about the recycling of this product, please contact your local city office, your household waste disposal service or your reseller.

EQUIPMENT


On each side of the cabinet, two M6 with 80 mm pitch plus one M10 fittings will connect the ePS6-EN54 to accessories (VNI-VCPL365, VNU-BUMP, VNU-HBRK365, or eye-bolts).

The back of the speaker is fitted with 3x M6 (70mm pitch) to connect wallmount in both vertical and horizontal position (VNI-WM01, VNI-WM02).

2 pairs (In/Out) of 7.62 mm pitch screw terminal blocks. Cables from 0.75 mm² to 3.31 mm² (12 to 15 AWG) copper section.

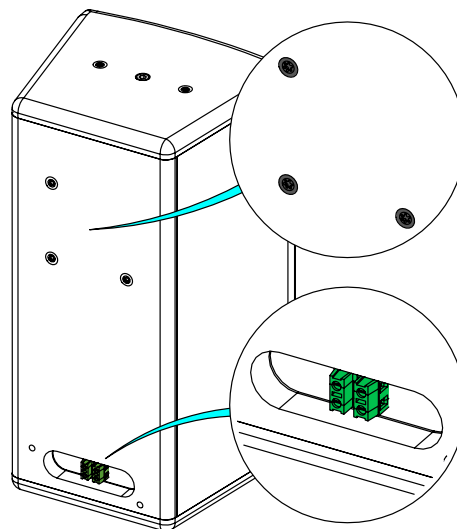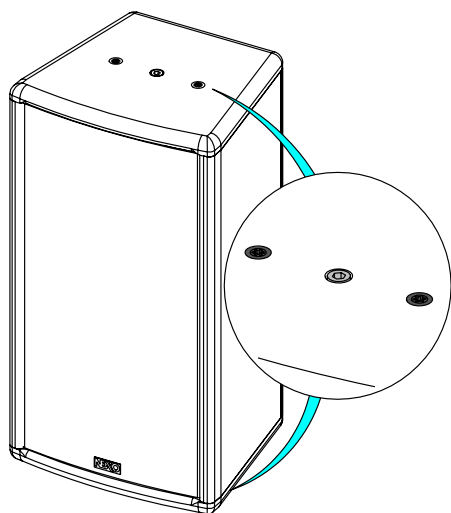


ePS6-EN54 with IPCov

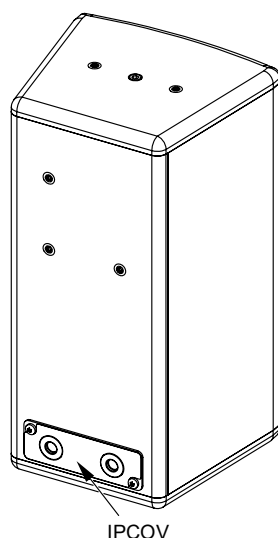


DESCRIPTION

DESCRIPTION

- The ePS6-EN54 is a compact full-range 2 ways speaker.
- Asymmetrical HF dispersion “PS” type.
- ePS6-EN54 can be used alone or with eLS400 subwoofers
- The speaker is equipped with 2 pairs (In/Out) of screw terminal blocks, permissible cables from 0.75 mm² to 3.31 mm² (12 to 15 AWG) copper section. Cable with maximum outside diameter of 11mm.

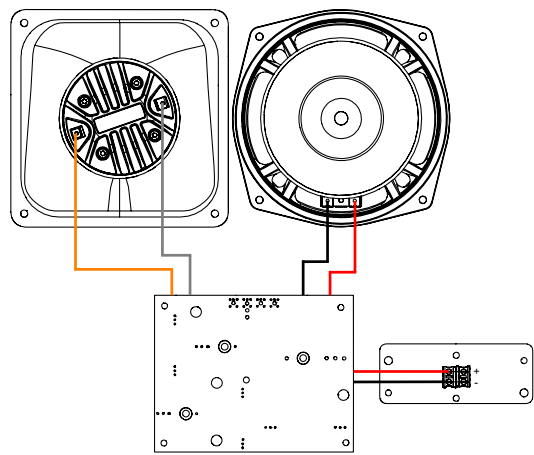

- To wire ePS6-EN54, slit the membrane of the grommet crosswise, pass the cable through and make the connection to the screw terminals. Place the IPCOV.

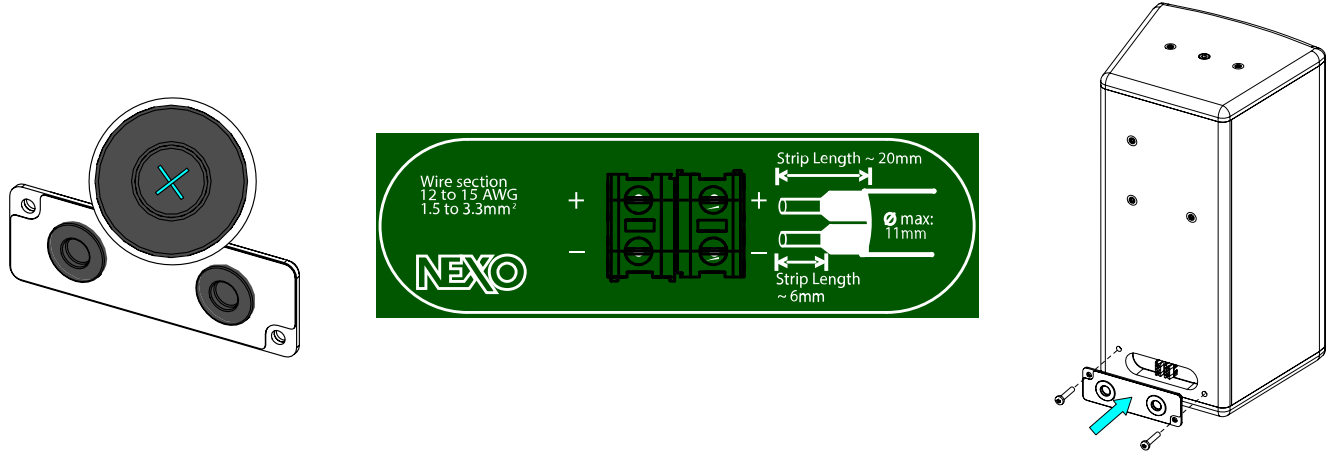

- IP55: be careful to place the IPCOV correctly.
- Amplification
 - The ePS6-EN54 speakers must be used with a NEXO processor to handle EQ, phase alignment, crossover and excursion/thermal protection for the system loudspeaker.
 - The following table shows the number of ePS6-EN54 speakers and eLS400 subwoofers usable with each solution.

nanoNXAMP4	
ePS6-EN54	1 per channel
eLS400	1 per bridged channels

	DTD + DTDAMP4X0.7	DTD + DTDAMP4X1.3	NXAMP4X1mk2	NXAMP4X2mk2	NXAMP4X4mk2
ePS6-EN54	Up to 2 per channel	Up to 2 per channel	Up to 4 per channel *	Up to 4 per channel	Up to 4 per channel
eLS400	1 per channel	1 per channel	Up to 2 per channel *	Up to 3 per channel	Up to 3 per channel



* Recommended powering solution

PRESET

Please consult nexo-sa.com for NEXO TD Controllers firmware information.

For the ePS6-EN54, the following setups are available:

- ePS6 MAIN, 90-20kHz.
- ePS6 MAIN, 120-20kHz.
- ePS6 MAIN, 150-20kHz.

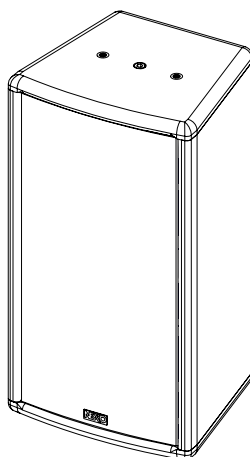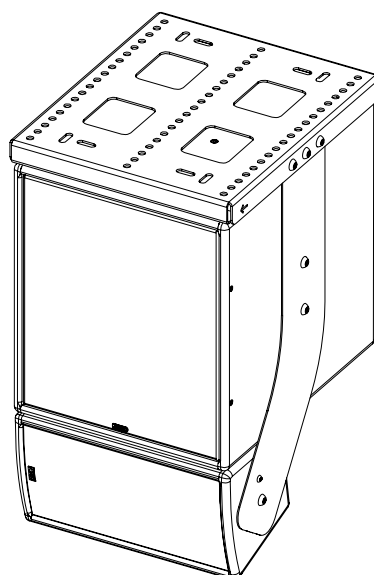ePS6-EN54**ePS6-EN54 + eLS400**



HF DIRECTIVITY

HF DIRECTIVITY

- The ePS6-EN54 speaker can be used in horizontal or vertical position.
- It's easy to change the HF dispersion to deal with every request.



Place a flathead screwdriver in the space between the grille and the cabinet to release the grille. Remove the 4 screws that hold the horn. Remove it.

Remove the grille.

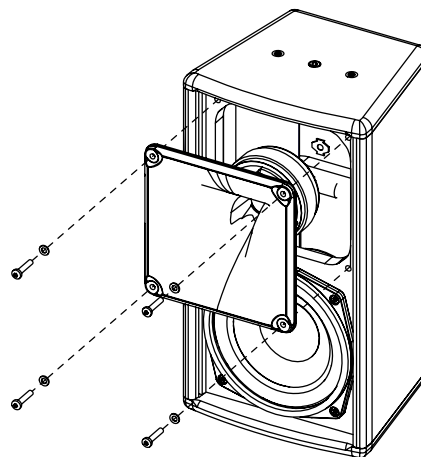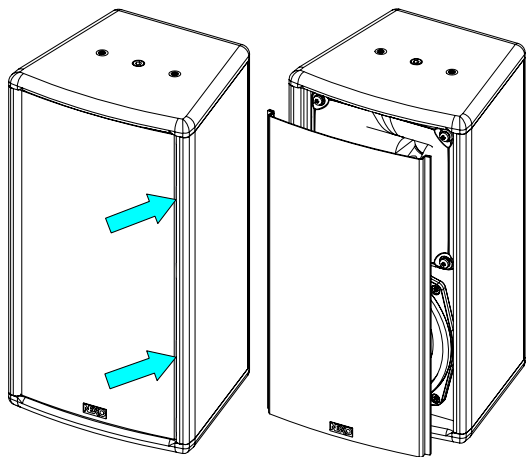

Position the horn according to the desired HF dispersion.

Narrow aperture = widest Dispersion

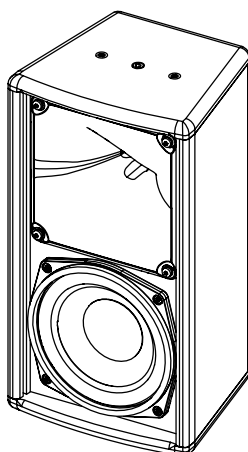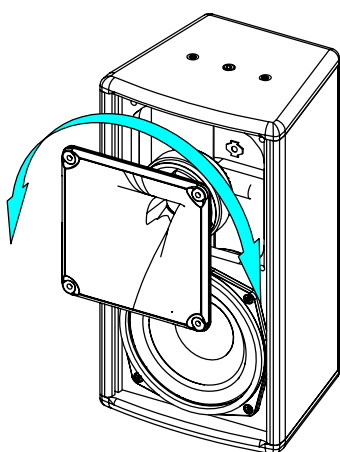

Reassemble the assembly and replace the grille.

CROSSOVER FREQUENCY

- 90 Hz: Full range application.
- 120, 150 Hz: use with eLS400.

ACCESSORIES

WARNINGS


All ePS accessories are specifically rated in agreement with structural computations.

Never use other accessories when assembling ePS6-EN54 cabinets than the ones provided by NEXO: NEXO will decline responsibility if any component is purchased from different supplier.

PROHIBITED: ePS6-EN54 below ePS6-EN54 or ePS6-EN54 below eLS400 without dedicated accessory


VNU-BUMP

LiftBar, can be used with VNI-WMADAPT.




Remove 2 screws on the top
Screw VNU-BUMP to ePS6-EN54 (use only screws provided with VNU-BUMP).
Tight properly.

Refer to the Product Data Sheet

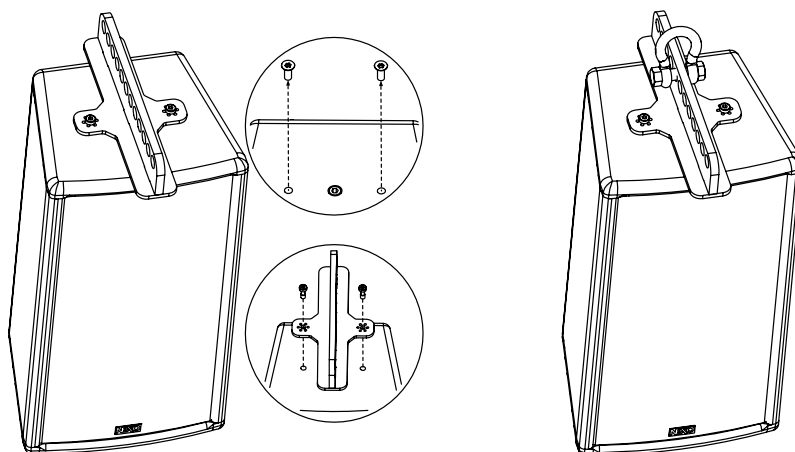


VNT-TCBRK3551

Rotary Truss Clamp



Place VNT-TCBRK3551 on VNU-BUMP at the desired hole.

Refer to the Product Data Sheet.



ACCESSORIES


VNU-HBRK365

Horizontal Cradle, usable with:

VNI-CLADAPT.

VNI-WM200.

VNU-PLADAPT.


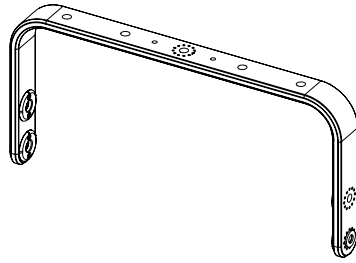


Remove the M10 inserts from each side.

Place HBRK365 on ePS6-EN54, use only fasteners provided.

Tight properly.

Refer to the Product Data Sheet

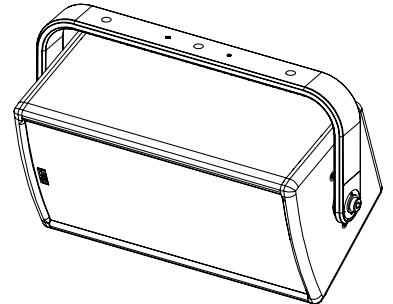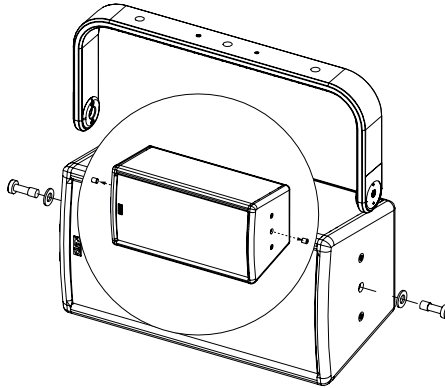

VNI-WMADAPT



Wall mount adapter



Place VNI-WMADAPT on VNU-BUMP, use only fasteners provided.


Tight properly.

Refer to the Product Data Sheet

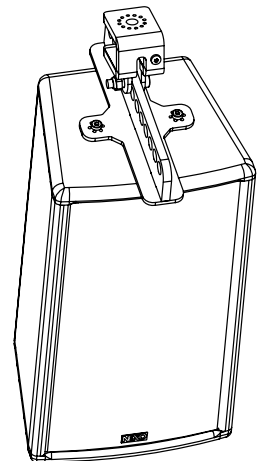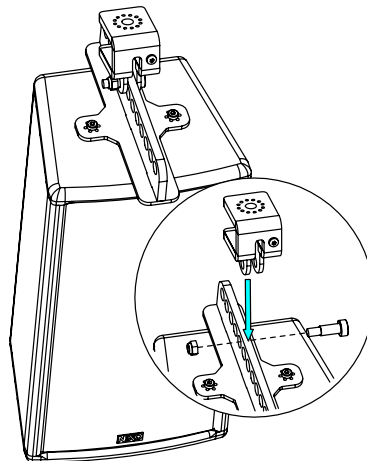

VNI-CLADAPT



Ceiling Adapter, use with VNI-HBRK365.



Screw VNI-CLADAPT to the ceiling (fasteners not provided).

Place the assembly on VNI-CLADAPT, use the 2 guides. Tight with the fasteners provided with VNI-CLADAPT.

Refer to the Product Data Sheet

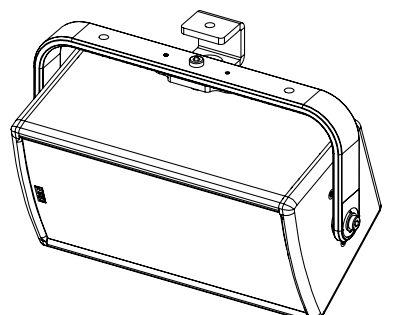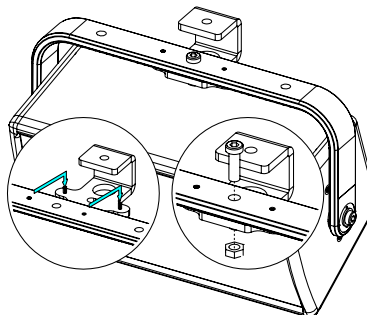


VNU-PLADAPT

Pole adapter

Place VNU-PLADAPT on VNI-HBRK365,
use only fasteners provided.
Tight properly.


Refer to the Product Data Sheet

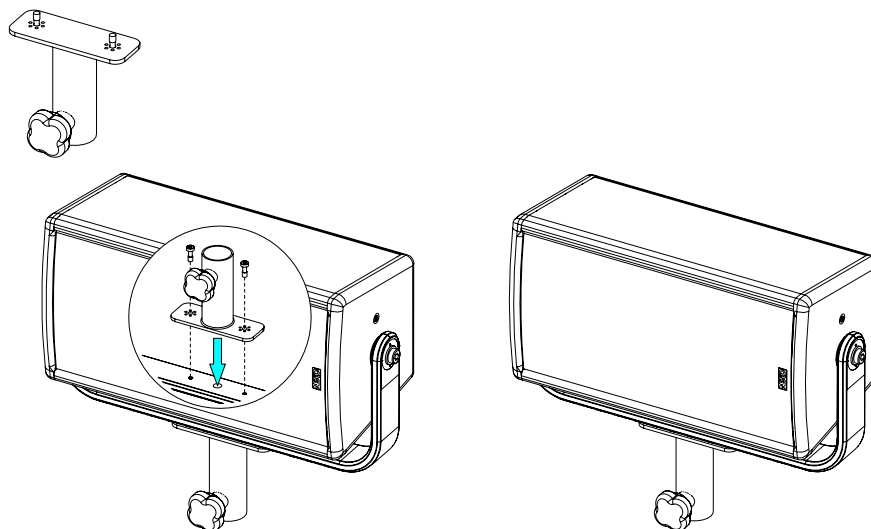**VNI-WM200**

Wallmount, usable with:


VNI-WMADAPT / VNU-BUMP

VNU-HBRK365

**ePS6-EN54 / BUMP / WMADAPT**


Place the assembly on VNI-WM200. Tight
with the fasteners provided with
VNI-WM200.

Refer to the Product Data Sheet

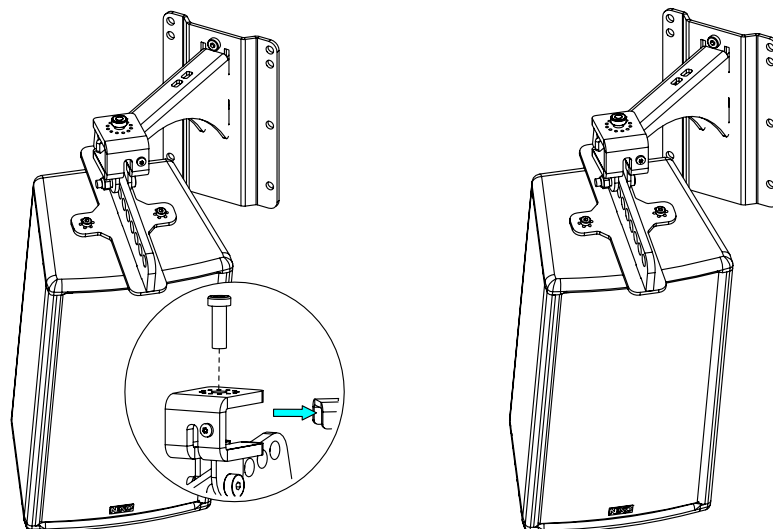**ePS6-EN54 / HBRK365**

Place the assembly on VNI-WM200. Tight
with the fasteners provided with
VNI-WM200.

Refer to the Product Data Sheet

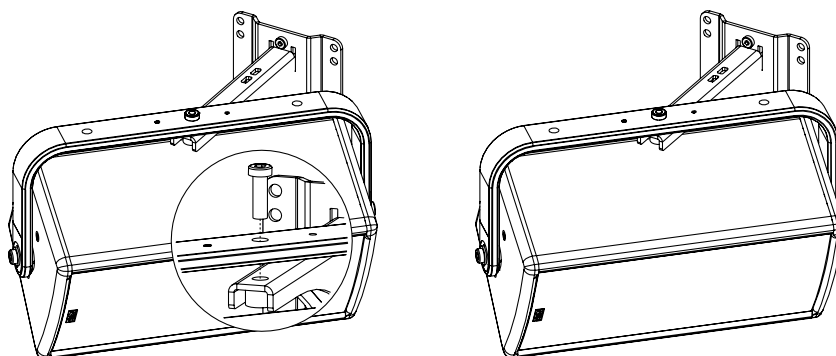


ACCESSORIES

VNI-VCPL365




Coupler ePS6 under vertical eLS400

Refer to the Product Data Sheet

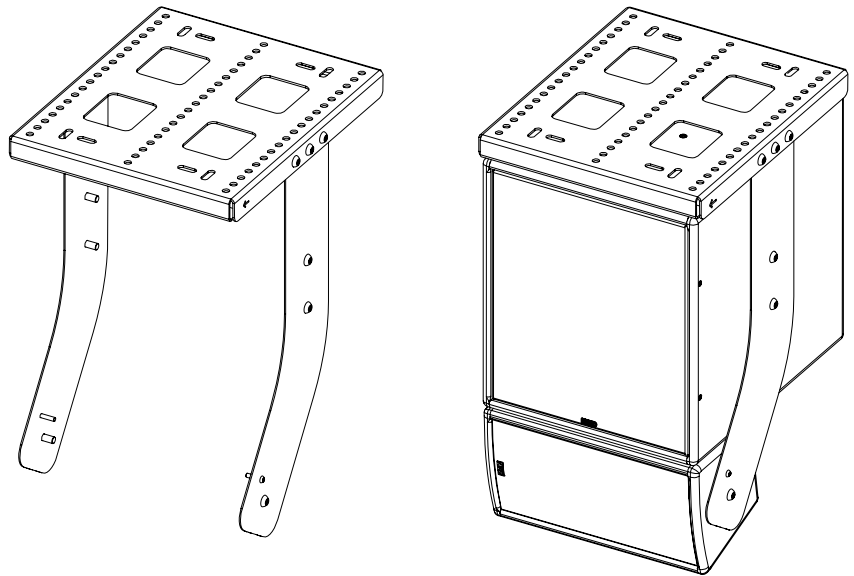





VNI-WM01

Wall mount adapter 15kg max

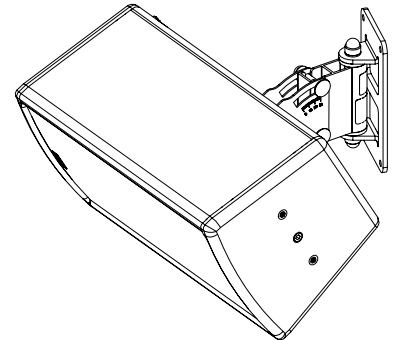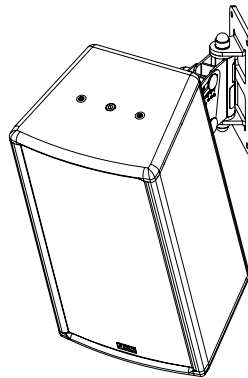




Remove 2 of the 3 screws on the back.
Screw speaker plate to ePS6-EN54 (use only screws provided with ePS6-EN54).
Place the speaker holder with ePS6-EN54 into wall bracket. Fix by tightening bolted assembly.

Refer to the Product Data Sheet

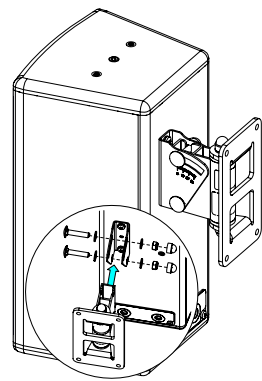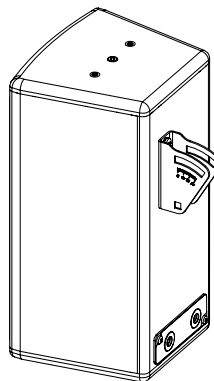



VNI-WM02

Wall mount adapter 25kg max

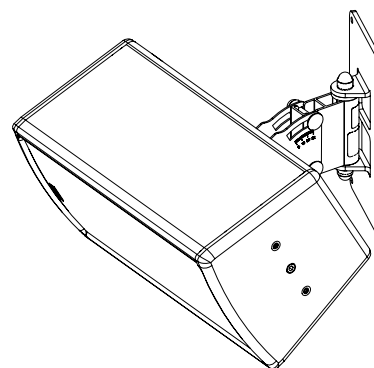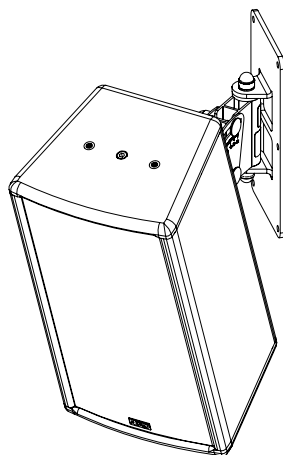



Remove 2 of the 3 screws on the back.
Screw speaker plate to ePS6-EN54 (use only screws provided with ePS6-EN54).
Place the speaker holder with ePS6-EN54 into wall bracket. Fix by tightening bolted assembly.

Refer to the Product Data Sheet

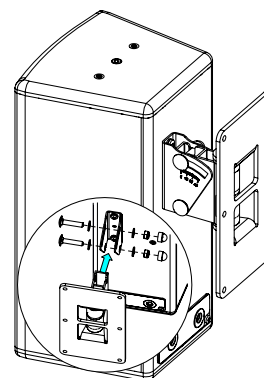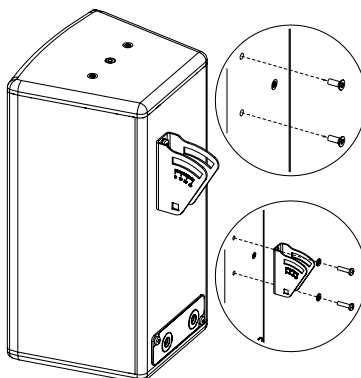

The ArrayEQ allows to adjust the system frequency response in its lower range
(see curves below, with different ArrayEq values):

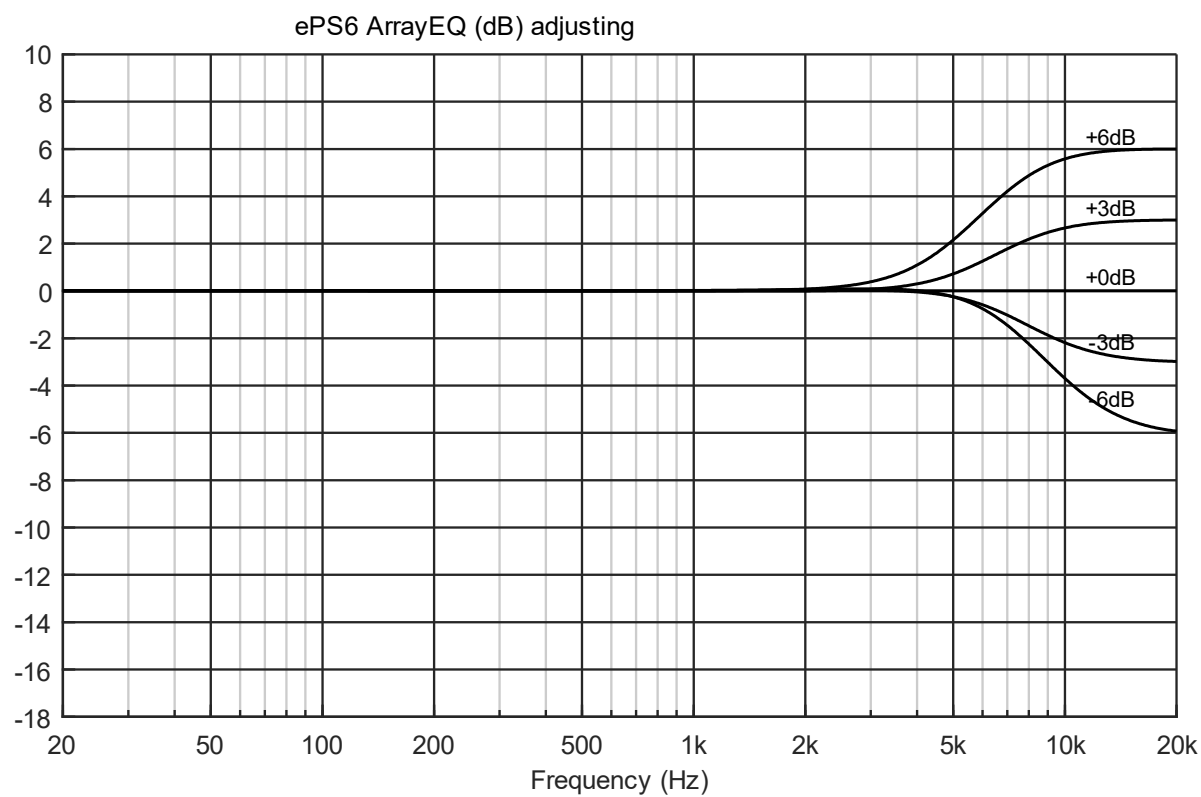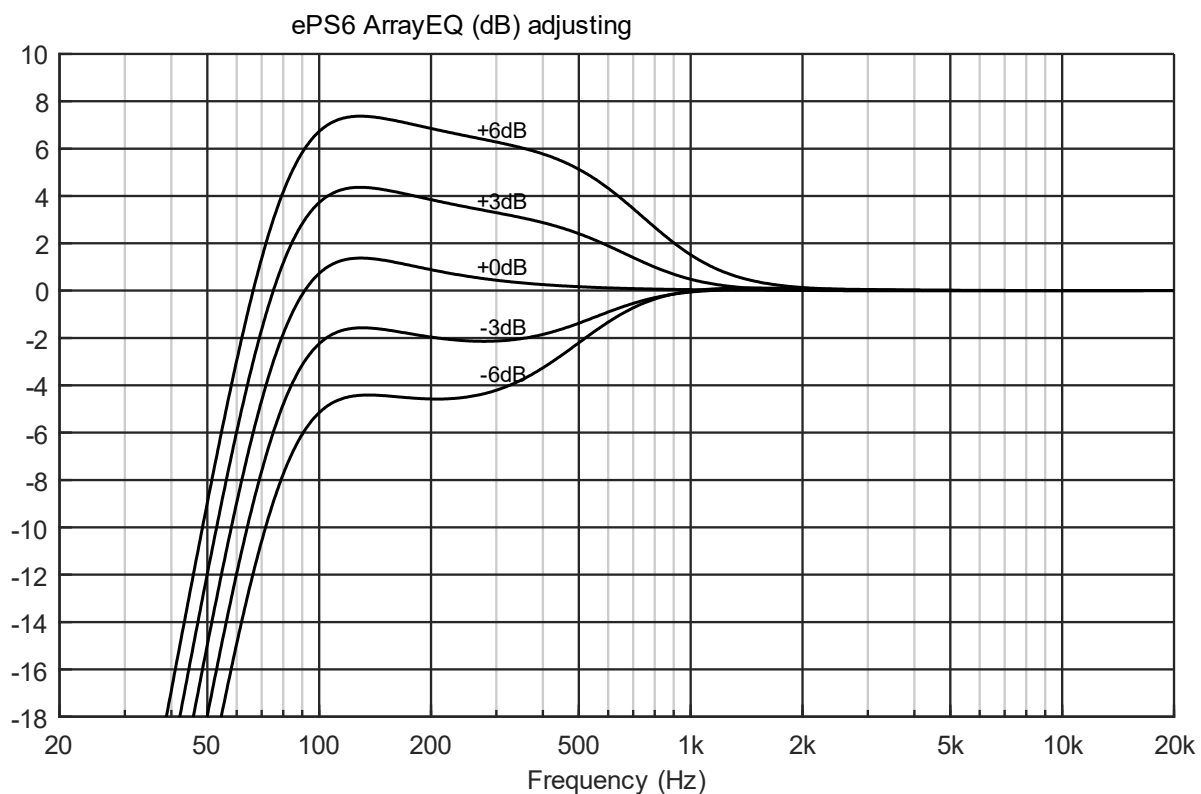

MAINTENANCE


NOTE:

Speakers and Grills can be sent back to NEXO for recycling


Driver access

Place a flathead screwdriver in the space between the grille and the cabinet to release the grille.

Remove the grille.

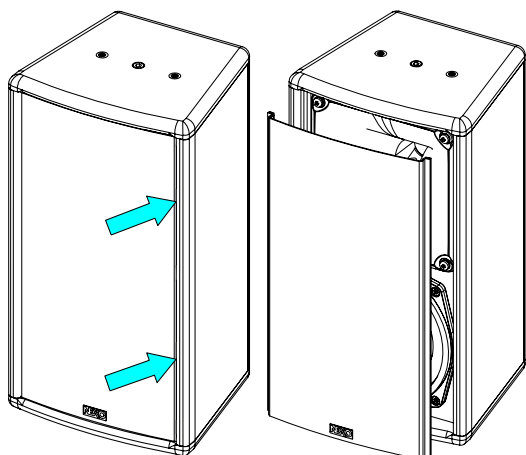

Remove the 4 screws that hold the horn. Remove it.
Tightening torque: 2.5 Nm (Thread Locker: Loctite 242)

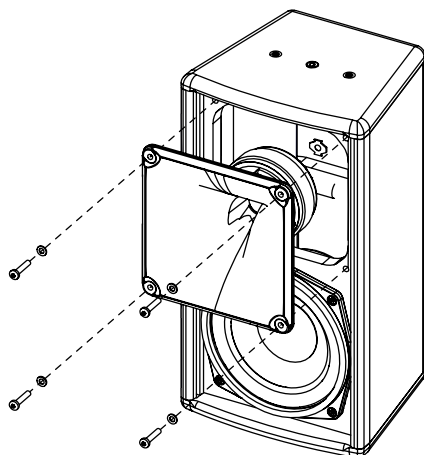


Reassemble the assembly and replace the grille.

LF: red (+) / black (-)


HF: orange (+) / grey (-)

Remove the 4 screws to access the LF driver.

Tightening torque: 3.5 Nm (Thread Locker: Loctite 242)

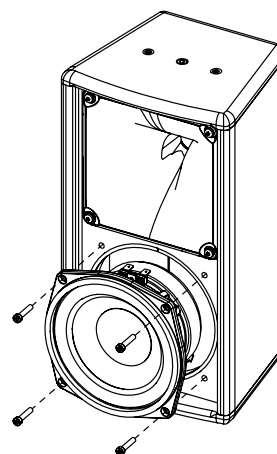


To access the HF diaphragm, remove the 4 screws.
Tightening torque: 1.7 Nm

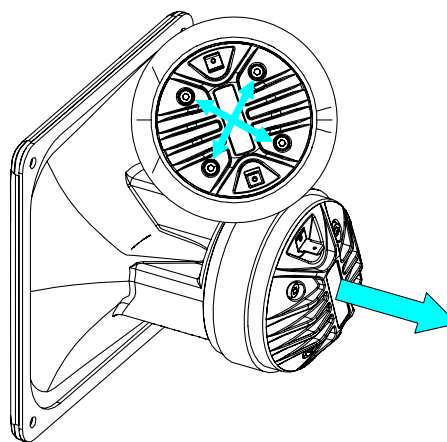

MAINTENANCE

Spare parts

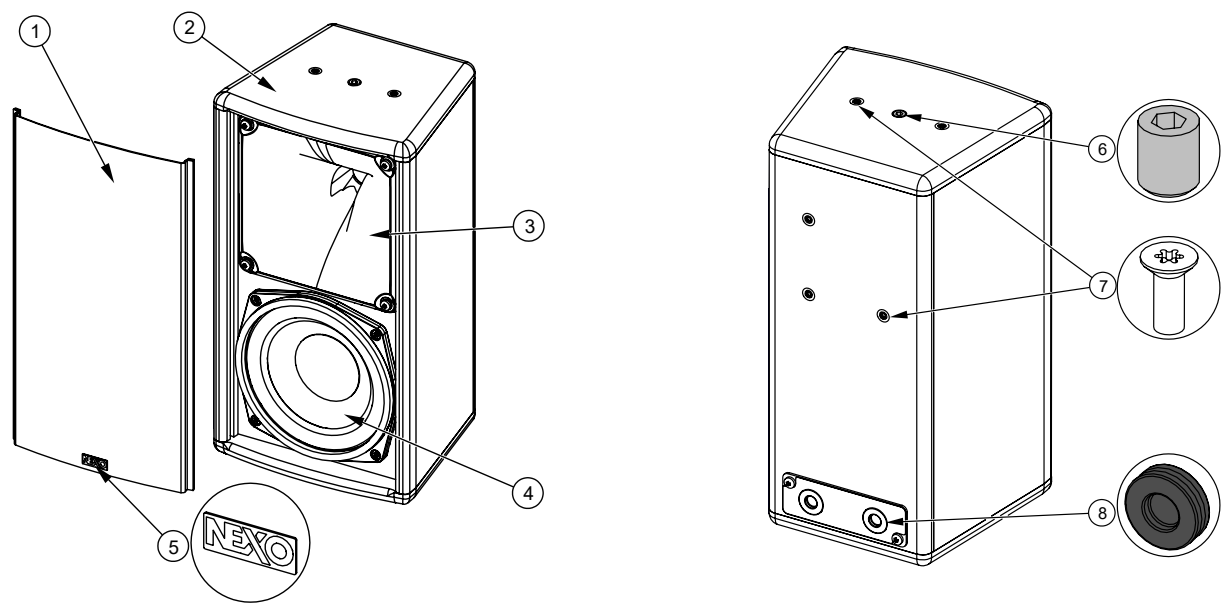


MARK	QUANTITY	REFERENCE	DESIGNATION
1	1	05EPS6EN54-UA	ePS6-EN54 Complete grille Black
	1	05EPS6EN54-UAPW	ePS6-EN54 Complete grille White
2	1	05EBEPS6	ePS6 Cabinet Black
	1	05EBEPS6-PW	ePS6 Cabinet White
3	1	05NH14-16R/K	HF diaphragm
4	1	05HPB6-44	HP 6" complete
	1	05HPB6-44R/K	Recone Kit 6"
5	1	05LOGNEXO3	Logo NEXO
6	2	05VXTSTHC1012N	HEADLESS Screw M10x12 Black (x10)
	2	05VXTSTHC1012	HEADLESS Screw M10x12 White (x10)
7	7	05VXTCFX616N	VXFX 6x16 Black (x10)
	7	05VXTCFX616	VXFX 6x16 White (x10)
8	2	05PASF-DG9E1	Grommet DG11 Ø15.5mm (x2)
	2	05PASF-DG11PW	Grommet DG11 White Ø15.5mm (x2)

TECHNICAL SPECIFICATIONS

WITH NEXO ELECTRONICS

Model	ePS6-EN54
Frequency range (± 6 dB)	90 Hz – 20 kHz
Peak SPL Level (1m)	125 dB Peak
Operating voltage	22 Vrms
Vertical Dispersion	+25°/-30°
Horizontal Dispersion:	50° to 100° asymmetrical
Crossover Frequency	90, 120, 150 Hz
Impedance	8 ohms

SPECIFICATIONS

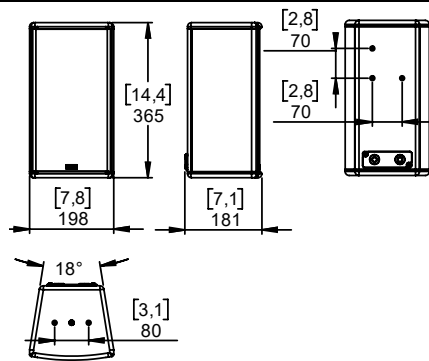Model	ePS6-EN54
Components	LF 6" long excursion 8 ohms HF 1.4" diaphragm – 8 Ohms
Material	Baltic birch plywood 15mm
Finish	Black or White structural paint (Custom RAL upon request)
Front finish	Black acoustic fabric fitted back steel front grille
Fittings	2x M6 and 1x M10 on the top and bottom for rigging accessories. 3x M6 on the back for rigging accessories (70mm pitch).
Connector	2 pairs (In/Out) of 7.62 mm pitch screw terminal blocks. Cables from 0.75 mm ² to 3.31 mm ² (12 to 15AWG) copper section. Cable with maximum outside diameter of 11 mm.
Weight	7.1 kg / 15.7 lb
IP Classification	IP55 with IPCOV
Dimensions	 <p>Technical drawing of the ePS6-EN54 speaker showing front, side, and top views with dimensions in millimeters and inches in brackets.</p> <ul style="list-style-type: none"> Front view: Height 365 mm [14.4"], Width 198 mm [7.8"] Side view: Height 365 mm [14.4"], Width 181 mm [7.1"] Top view: Width 198 mm [7.8"], Depth 80 mm [3.1"] Mounting holes: Spacing 70 mm [2.8"] Dispersion angle: 18°

TECHNICAL SPECIFICATIONS

DATA ACCORDING TO EN54-24 : 2008

Nominal Continuous Power	100 W
Operating Voltage	22 Vrms
Nominal Impedance	5 Ω
Sensitivity 1W@4meters	74 dB
Max Continuous Sound Pressure @4meters	94 dB SPL

Frequency Band	100	125	160	200	250	315	400	500	630	800	1000
Sound Pressure Level per band / Total 1W @ 4 meters (dBSPL)	54	60	60	64	63	64	62	59	60	61	60
Frequency Band	1250	1600	2000	2500	3150	4000	5000	6300	8000	10000	
Sound Pressure Level per band / Total 1W @ 4 meters (dBSPL)	62	63	62	59	59	59	60	61	60	60	

Sound Pressure Level per band / Total 1W @ 4 meters (dBSPL)

100 Hz à 10 kHz 74

Directivity

Frequency Band	500	1000	2000	4000
Horizontal directivity averaged per octave on-axis normalized -6 dB (Positive Angle)	105	65	50	40
Horizontal directivity averaged per octave on-axis normalized -6 dB (Negative Angle)	-105	-65	-50	-40
Vertical Directivity averaged per octave on-axis normalized -6 dB (Positive Angle)	150	75	50	20
Vertical Directivity averaged per octave on-axis normalized -6 dB (Negative Angle)	-150	-75	-45	-45

All above specifications are for free-field measurements.
Reference axis is the line orthogonal to the grill, intersecting the grill in the middle.
Reference plane is aligned on cabinet front grill.
Horizontal plan is perpendicular to the reference plane in the width direction.

USER NOTES

NEXO S.A.

Parc d'activité de la Dame Jeanne
F-60128 PLAILLY

Tel: +33 3 44 99 00 70
Fax: +33 3 44 99 00 30
E-mail: info@nexo.fr

nexo-sa.com

NEXO