



P series

Compact, high-output, point source
loudspeakers and sub-bass cabinets



Live
Events



Corporate &
Public Spaces



Theatres



Clubs



Bars &
Restaurants



Houses of
Worship



Sports
Arenas



Immersive
Audio

nexo-sa.com



Thinking. Inside the box.

NEXO

A
Yamaha
Group
Company



A point source power!

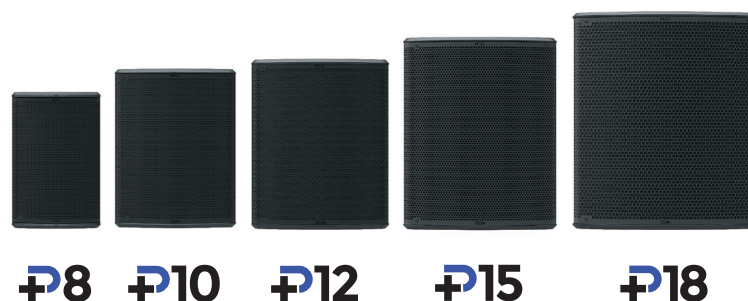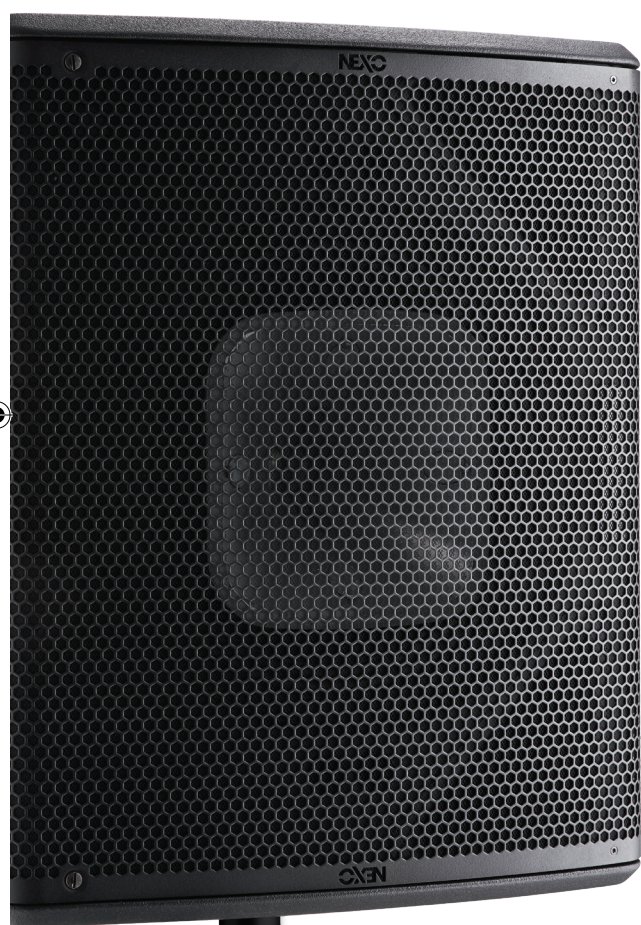


Building on NEXO's acclaimed expertise in compact, high-output, point source loudspeakers, the P+ Series delivers pristine, full-range sound at even greater Sound Pressure Levels, along with unparalleled versatility, thanks to an ingenious system for varying HF coverage patterns.

An exciting synergy of sleek good looks and stunning performance, the P8, P10, P12, P15 and P18 loudspeakers employ custom 8, 10, 12, 15 and 18-inch LF/HF drivers in a coaxial configuration to deliver perfect phase alignment, exceptional clarity and a smooth response across the full frequency range. Available in mobile and install versions, the curved, low-profile cabinets can be deployed both vertically or horizontally (as a wedge monitor), in Touring, Install and TIS versions and feature pole-mounting hardware and rigging points. Additionally, the P12, P15 and P18 can be used in both Active and Passive modes.




P8, P10, P12, P15, P18
Main Cabinets



Dedicated L15, L18
and L20 Subs



142dB Peak SPL
(P18/Active Mode)




Variable
HF Directivity



Low-Profile
Cabinets

house

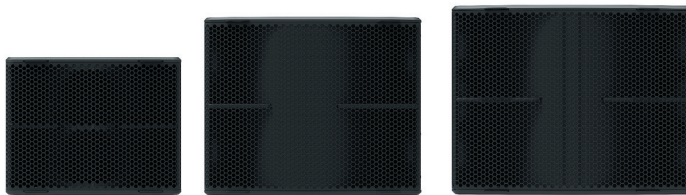


L15

L18

L20

The L15, L18 and L20 subs are ideal partners for the P+ Series main cabinets, extending LF performance down to 40Hz, 32Hz and 28Hz respectively, while NEXO's NXAMPmk2 or DTD/DTDAMP deliver tailored power and processing solutions, combining multi-channel, high powered, networkable amplification with sophisticated loudspeaker control and protection. Linear phase presets for P+ cabinets in both vertical and horizontal configuration – and for the full range of NEXO cabinets – make it quick and easy to configure a 'Plug & Play' solution for any system.

With the P+ Series, musicians, DJs, theatres and event organisers can expect extraordinary performance from a compact system, while production and rental companies look set to enjoy the industry-leading levels of return on investment upon which the reputation of NEXO point source loudspeakers are built.



Coaxial, Long-Excursion Drivers




Active/Passive Switching (P12/P15/P18)



Touring, Install and TIS Versions


Variable

Optimise the c

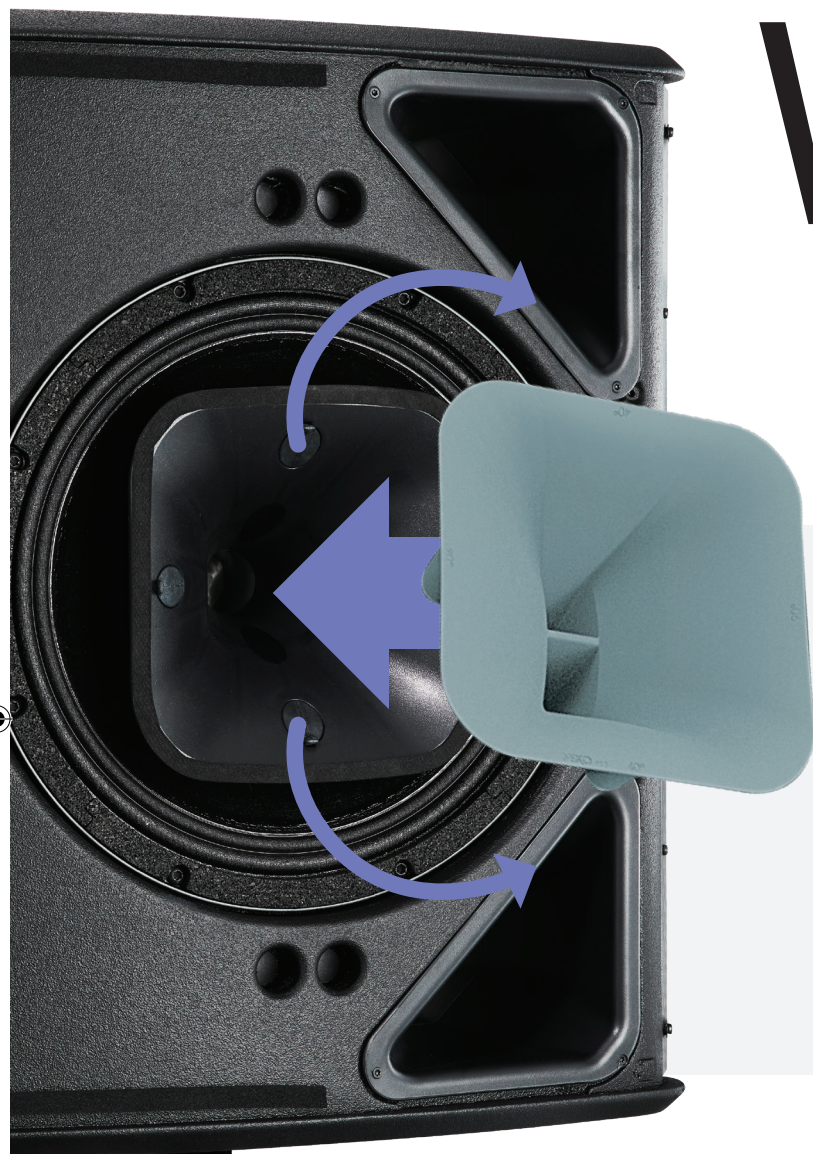


P12, P15 and P18 optional magnetic flanges


The dispersion characteristics of the P12, P15 and P18 can be changed in seconds through the addition of optional magnetic flanges. The standard cabinets use a 60° x 60° horn with additional 90° x 40° and Asymmetrical (PS Type) 60° - 100° x 40° also available.



Standard Horn Profile
60° x 60° Dispersion



90° x 40° Horn Flange
Rotatable




Asymmetrical (PS Type)
PNT-P12FLGPS - (60°~100°) x 40°
PNT-P15FLGPS - (50°~90°) x 40°
PNT-P18FLGPS - (50°~90°) x 40°




P8 and P10 optional magnetic horn

By default, the P8 and P10 cabinets use a 100° x 100° horn. In the case of these cabinets, the dispersion characteristics can be changed by fitting an optional, rotatable 110° x 60° horn.



Standard Horn
100° x 100° Dispersion



110° x 60° Horn
Rotatable

HF Directivity

the dispersion for your application in just a few moments

Presets for vertical and horizontal deployment

A dedicated NXAMP preset for every horn/flange configuration in each P+ Series cabinet ensures perfect coverage at any frequency. The phase of the P+ Series setups is compatible with all other NEXO speakers and subs, except for the monitor setups where latency is minimised.



Advanced cabinet design with quick-release grille

Changing the horn/flanges is easy and requires no tools – the quick-release steel grille can be removed in seconds providing full access (touring versions only).

With a fully symmetric design, there are no left or right versions of the P+ Series cabinets, so inventory requirements are significantly streamlined. The cabinets are built around a 15mm (18mm for P18) custom-profiled plywood shell, using poplar veneer for the inner layers and birch on the outside to ensure strength, rigidity and light weight. Bass-reflex tuning is achieved through two computer-optimised ports to deliver ultra-low distortion, even at very high output levels.



Configure the

Main Cabinets



P8

Measuring 276mm wide x 423mm high x 250mm deep and weighing 12Kg, the P8 can be deployed in vertical or horizontal (wedge monitor) configurations, with HF directivity set to match the specific application. P8 cabinets are available in touring, installation and hybrid TIS formats.



129dB Peak SPL



8-inch Bass/
Mid Driver



P10

Measuring 384mm wide x 497mm high x 274mm deep and weighing 15Kg, the P10 can be deployed in vertical or horizontal (wedge monitor) configurations, with HF directivity set to match the specific application. P10 cabinets are available in touring, installation and hybrid TIS formats.



136dB Peak SPL



10-inch Bass/
Mid Driver



P12

Measuring 432mm wide x 531mm high x 317mm deep and weighing 20Kg, the P12 can be deployed in vertical or horizontal (wedge monitor) configurations, with HF directivity set to match the specific application. P12 cabinets are available in touring, installation and hybrid TIS formats.



138dB (passive) /
140dB (active)
Peak SPL



12-inch Bass/
Mid Driver



Passive/Active
Modes



P15

Measuring 483mm wide x 600mm high x 352mm deep and weighing 23Kg, the P15 can be deployed in vertical or horizontal (wedge monitor) configurations, with HF directivity set to match the specific application. P15 cabinets are available in touring, installation and hybrid TIS formats.



141dB (active) /
139dB (passive)
Peak SPL



15-inch Bass/
Mid Driver



Passive/Active
Modes



P18

Measuring 579mm wide x 680mm high x 446mm deep and weighing 33Kg, the P18 can be deployed in vertical or horizontal (wedge monitor) configurations, with HF directivity set to match the specific application. P18 cabinets are available in touring, installation and hybrid TIS formats.



142dB (active) /
140dB (passive)
Peak SPL



18-inch Bass/
Mid Driver



Passive/Active
Modes

perfect system

Sub-bass Cabinets



L15


Measuring 650mm wide x 430mm high x 550mm deep and weighing 35Kg, the L15 sub employs a 15" long excursion driver in Baltic birch / poplar plywood cabinet with threaded inserts for mounting accessories and an M20 stand fitting. Available in touring format only.



139dB Peak SPL



15-inch Bass Driver



L18

Measuring 680mm wide x 559mm high x 775mm deep and weighing 50Kg, the L18 sub employs a 18" long excursion driver in Baltic birch / poplar plywood cabinet with threaded inserts for mounting accessories and an M20 stand fitting. Available in touring format only.



140dB



18-inch Bass Driver



L20

Measuring 755mm wide x 594mm high x 905mm deep and weighing 59 Kg, the L20 sub employs a 20" long excursion driver in Baltic birch / Poplar plywood cabinet with threaded inserts for mounting accessories and M20 stand fitting. Available in touring format only.



141dB



20-inch Bass Driver

Touring and Installation Versions

P+ Series main cabinets are available in touring, installation or hybrid 'TIS' formats. The touring models feature rugged, quick-release steel grilles and handles with integrated 35mm pole mounts on both sides / ends of the cabinet. Speakon connectivity is replicated on the cabinet sides and rear panel, ensuring tidy wiring when used in either main or wedge monitor configurations. Installation versions

feature a fixed cloth-covered grille, universal rigging points on the sides and bottom of the cabinet and 2-core cable for audio input to ensure IP54 protection index. TIS versions feature touring handles and connectivity, with cloth-covered grilles. The L15, L18 and L20 subs are available in touring format only.

P Series (not only install) can be specified in any RAL colour



Touring Cabinet Connectivity



Installation Cabinet Connectivity




Bringing precision, high-output performance to a range of fixed and mobile applications


The facility to change the HF directivity makes the P+ Series extremely flexible in a range of mobile and fixed applications. Deployed as a wedge monitor, the P+ cabinets become uniquely versatile, as sound engineers and rental companies can quickly 'tune' the HF coverage to suit the musician: wide for guitarists or narrow for brass sections, while a P+ main cabinet on an L sub creates a perfect drum fill monitor.



DJ

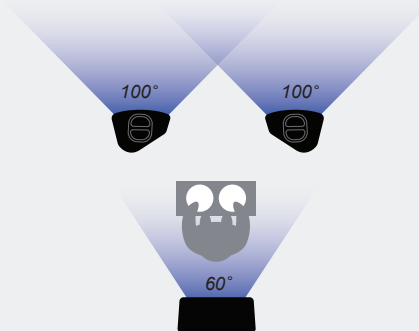

Small Club: 2 x P12 with 'PS Horn' for FOH, 1 x P12 with standard horn for monitor

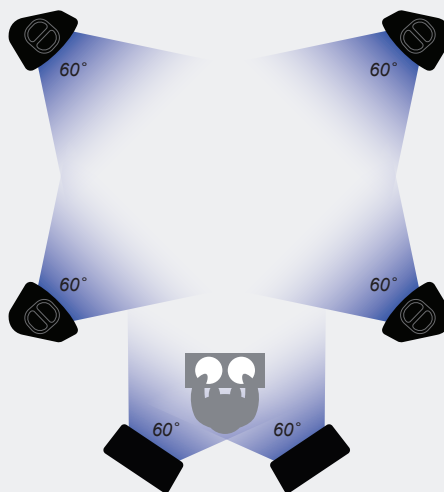

Large Club: 4 x P18 located in each corner of the room, with 2 x P12 as monitors – all standard horns




Music




Guitarist Monitor: P15 wedge with 'PS horn' reversed

Drum Fill: P12 wedge with standard horn on L15 sub



Brass Section Monitors: P12 wedges with 90° x 40° horn for narrow horizontal coverage

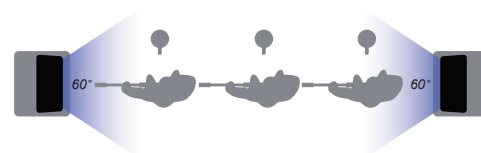

Side Fills: P12 wedges (standard horn) on L15 subs on each side




Events



Theatre




Public Spaces

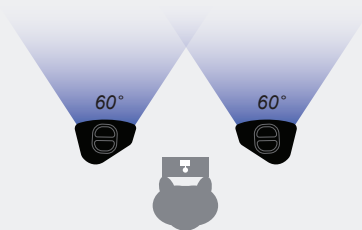


Simple System: 2 x P12 with standard horn




Small Theatre: 2 x P10 with standard horn as FOH

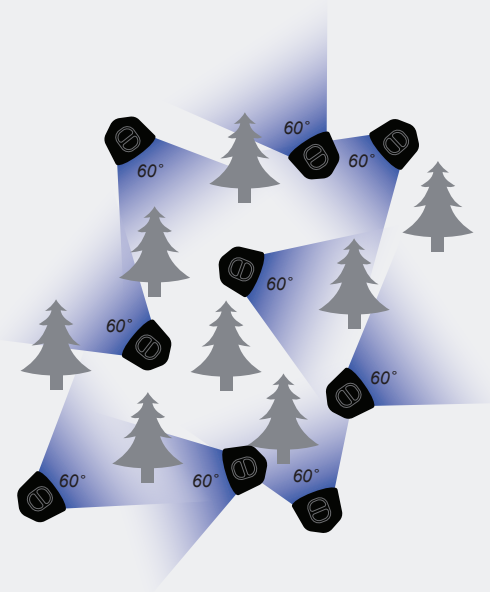


Leisure Park: 9 x P8 with 110° x 60° as a distributed system

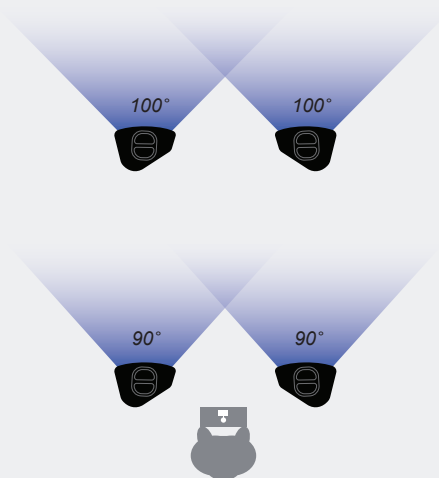

Long Throw System: 2 x P18 + 2 x P12 delayed – all with 'PS horn'

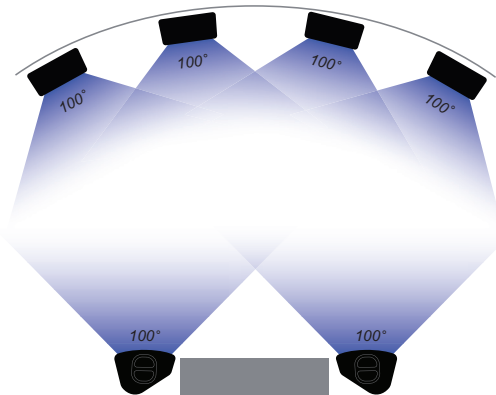


Large Theatre: 2 x P15 with 'PS horn' for FOH + 4 x P8 with standard horn under balcony

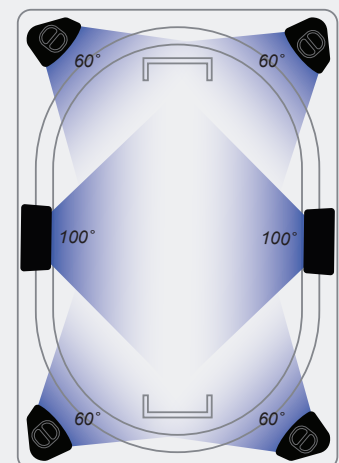


Small stadium: 4 x P12 with standard horn + 2 x P12 with 'PS horn' reversed

P8 Recommended Systems


It's easy to configure touring and fixed installation P8/L15 systems using DTD/DTDAMP and NXAMPMK2 power and processing

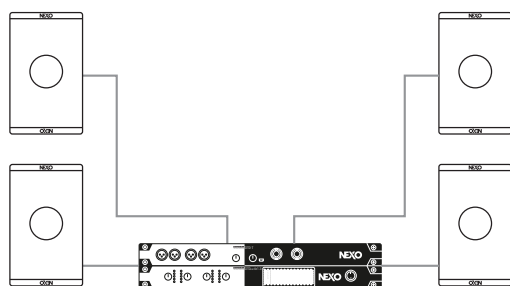


Stereo System: 2 x P8 per side
powered by 1 x DTD/1 x DTDAMP4x0.7

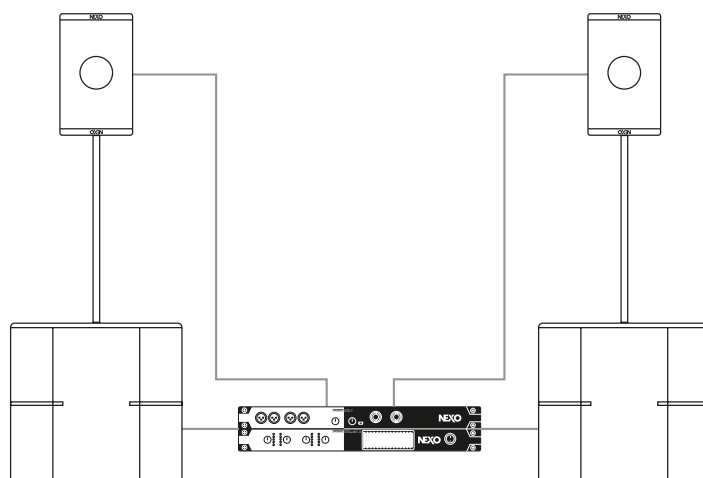

Stereo System with Subs: 1 x P8 + 1 x L15 per side
powered by 1 x DTD/1 x DTDAMP4x1.3

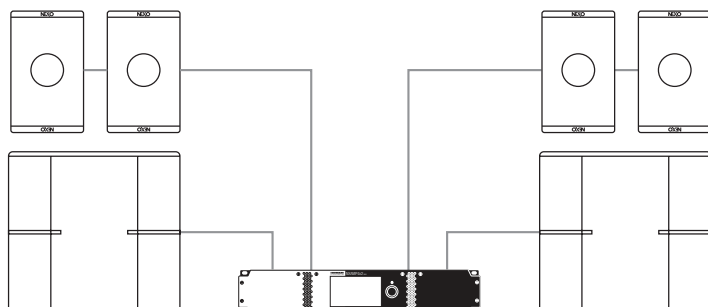

Higher Power System with Sub: 4 x P8 + 2 x L15
powered by NXAMP4X1MK2

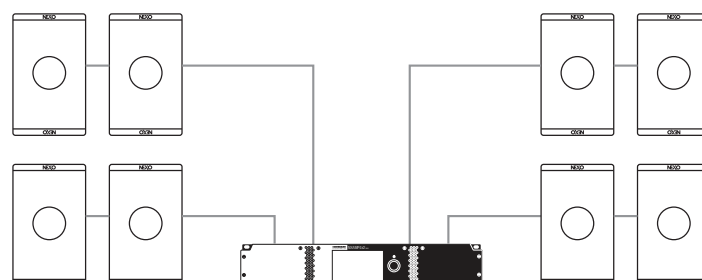

Distributed System: 8 x P8
powered by NXAMP4X1MK2


DTD-T/DTDAMP



DTD/DTDAMP: Dedicated power and processing for touring and installed systems

Ideal for powering smaller P+ Series systems, the 4-channel, 1U rack-mounting DTDAMP is available in two versions: 4 x 700 Watts and 4 x 1300 Watts (4 x 4 Ohms). The DTDAMP partners perfectly with the touring and install versions of the DTD Controller to create a compact, light-weight, intelligent powering solution that's easy to configure – either in a 'dry hire' application where the user has limited knowledge, or in a fixed installation.


And for more power, the NXAMP4X1_{MK2} combines advanced signal processing with 4 x 1300 Watts amplification.

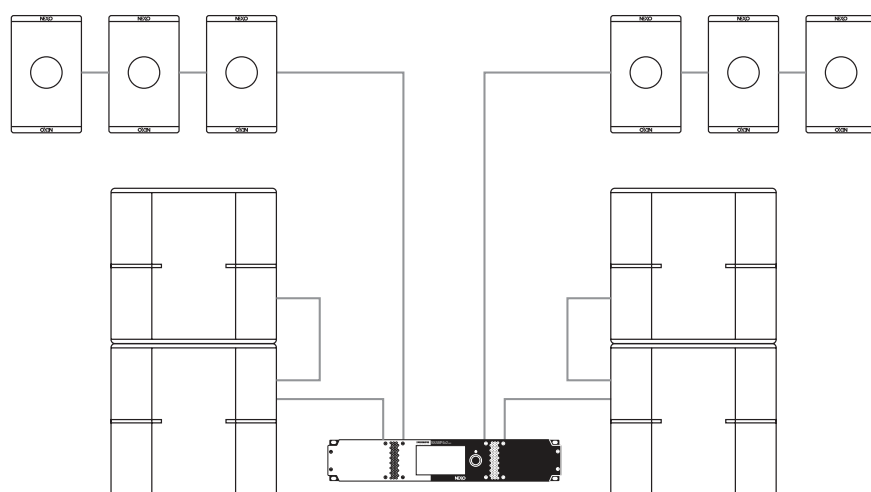


Compact, High-Power System: 6 x P8 + 4 x L15
powered by NXAMP4X2_{MK2}

P10 Recommended Systems


DTD/DTDAMP and NXAMPMK2 provide flexible power and processing solutions for P10/L15 systems

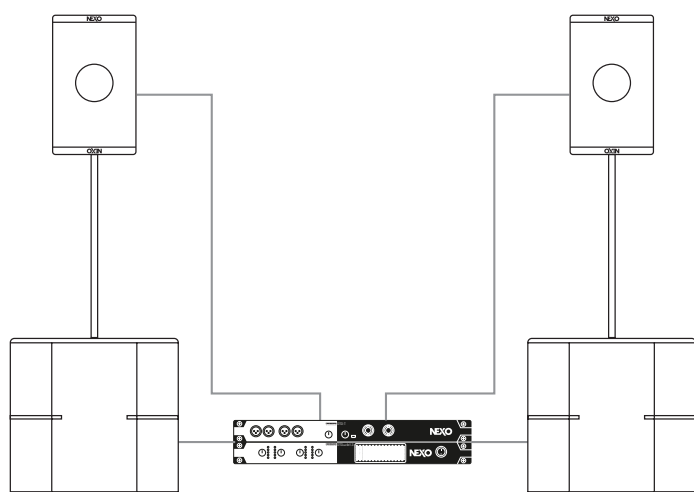


Stereo System: 2 x P10 + 2 x L15
powered by 1 x DTD/1 x DTDAMP4x1.3

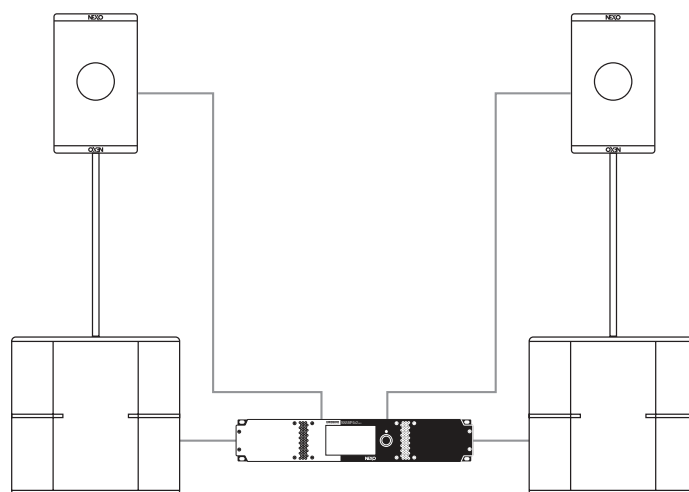

Stereo System: 2 x P10 + 2 x L15
powered by NXAMP4X1_{MK2}

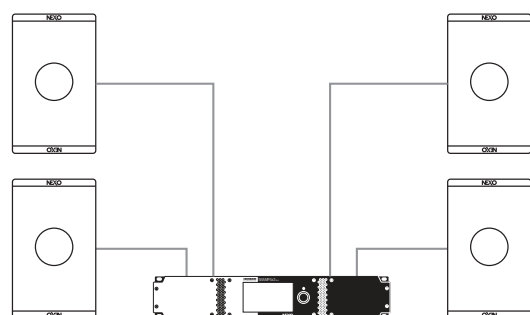


Distributed System: 4 x P10
powered by NXAMP4X1_{MK2}

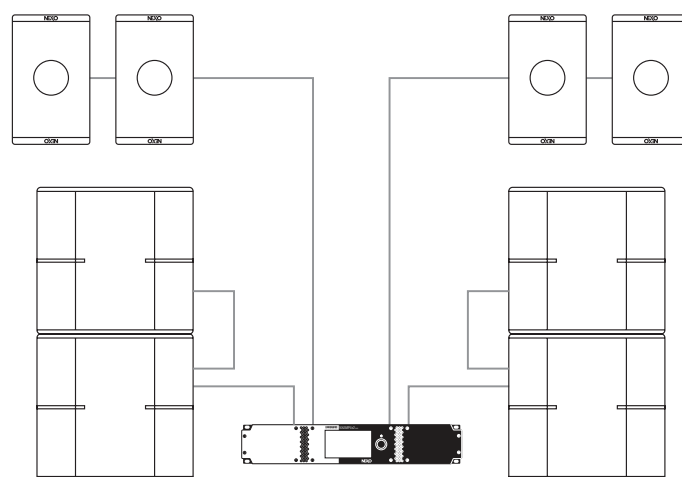


Compact, High-Powered System: 4 x P10 + 4 x L15
powered by NXAMP4X2_{MK2}

NXAMP4X2MK2

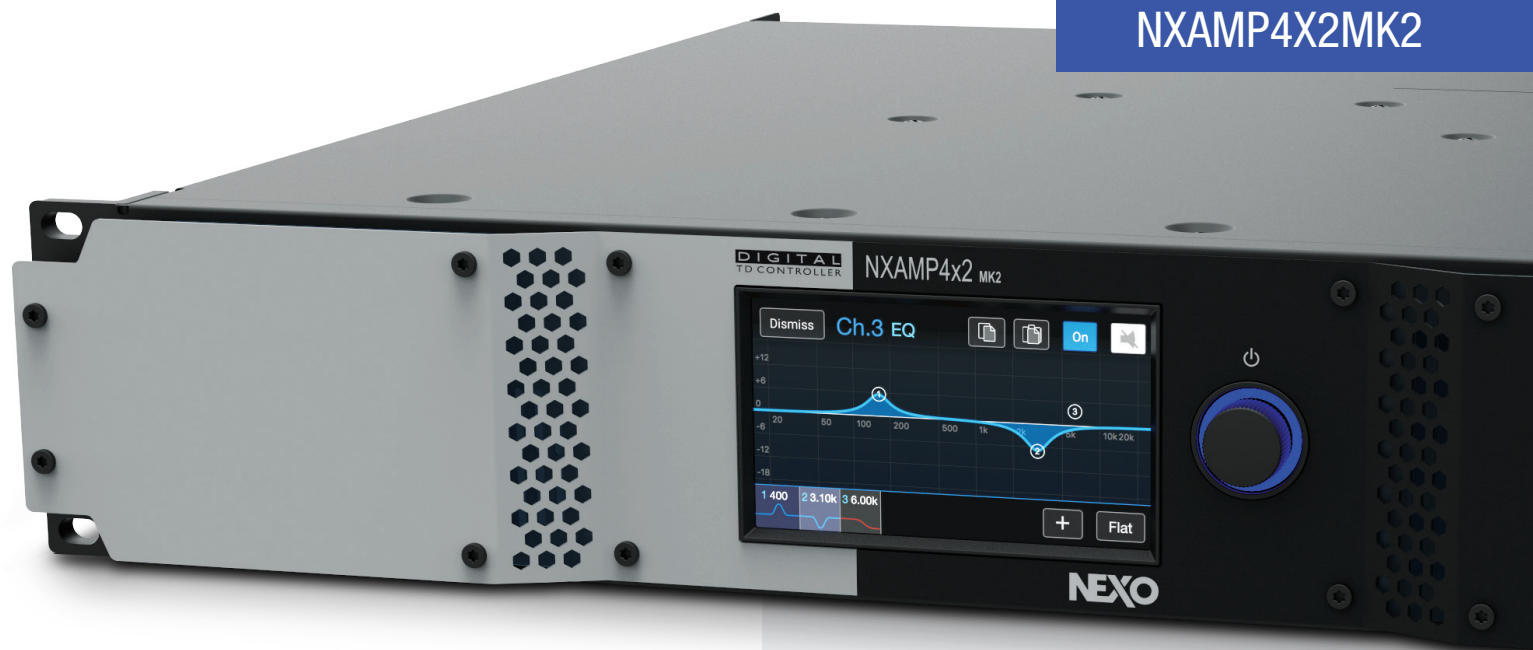

NXAMP4X2MK2: The perfect power and processing partner

With models rated at 4 x 1300 Watts, 4 x 2500 Watts and 4 x 4500 watts, NXAMP_{mk2} combines advanced signal processing with four state-of-the-art Class D amplifiers to create a flexible, light-weight powering and control solution that's perfect for use with P+ Series systems. Easy to set up and quick to deploy, all essential parameters are readily accessible via a large colour touch-screen on the front panel, with a comprehensive range of control and networking facilities on the rear panel. 32-bit/96KHz converters and 64-bit signal processing combine to assure pristine sound quality.

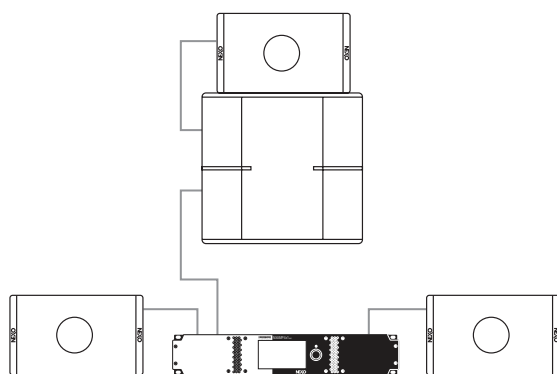

Monitor System: 1 x P10 Wedge on 1 x L15 Sub (Drum Fill) + 2 x P10 Wedges powered by NXAMP4X1_{mk2}

NeMo

Ether
IP
Sound

Dante

AES/EBU

Class D

4.3"
display

Tactile
screen


x2
Dual Ethernet
Port

PIFIC


*optional

P12 Recommended Systems


NXAMP4X2MK2 delivers the perfect power and processing solution for P12/L15 systems in a variety of configurations

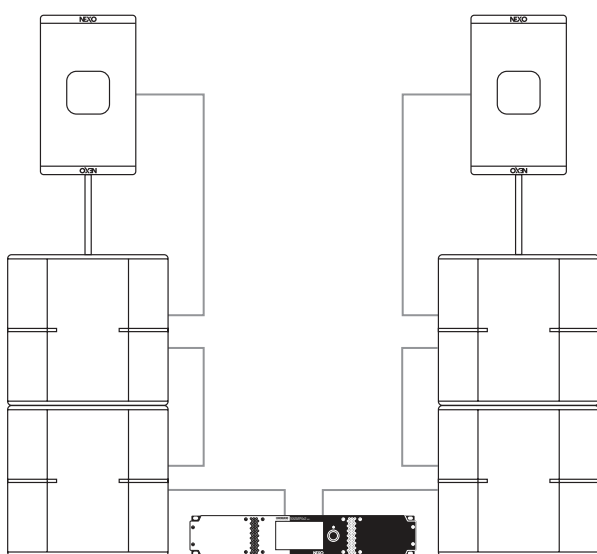


Stereo System: 1 x P12 (Passive) with pole stand
on 2 x L15 Sub per side

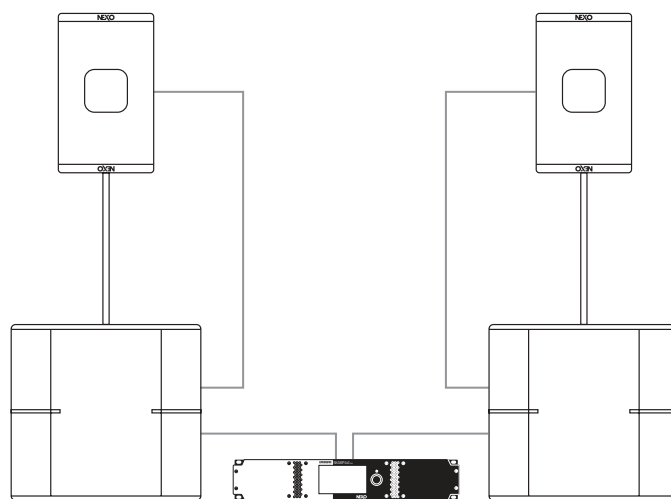


Stereo System: 1 x P12 (Passive) with pole stand
on 1 x L18 Sub per side

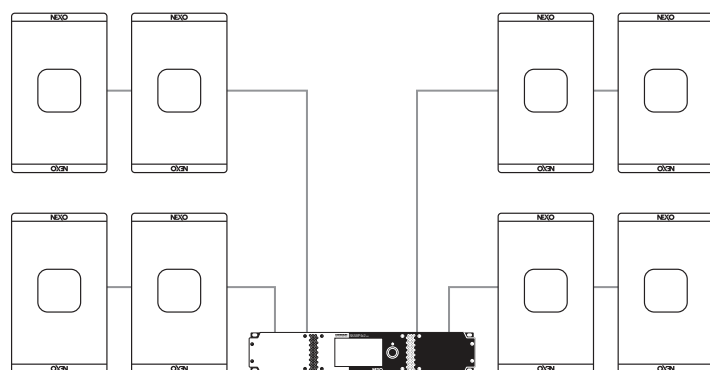

Distributed System: 8 x P12 (Passive) – 2 per amplifier channel

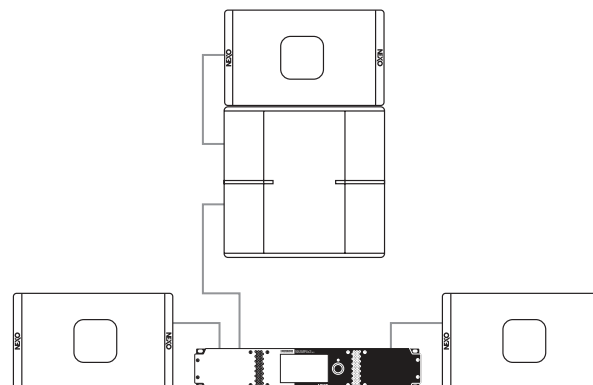

Monitor System: 1 x P12 Wedge on 1 x L15 Sub
(Drum Fill) + 2 x P12 Wedges

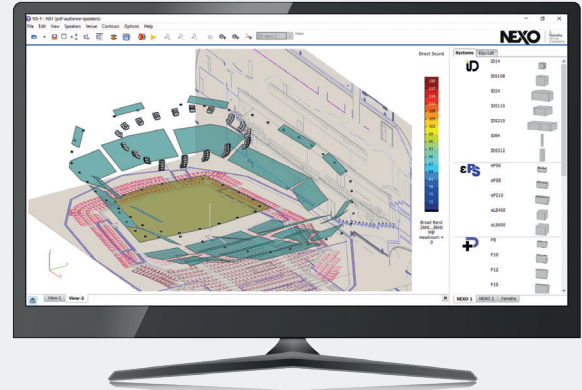


System configuration, management and remote control software


NEXO software applications make it easy to design, configure and implement P+ Series systems in mobile and fixed installations.

NS-1

Available to download free of charge, NS-1 is a powerful and intuitive system configuration and simulation tool enabling NEXO users to configure and optimise the performance of any NEXO system by predicting its behaviour in any venue to ensure uniform SPL coverage.

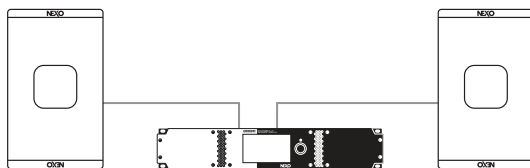


Active System: Stereo, 1 x P12 (Active) per side

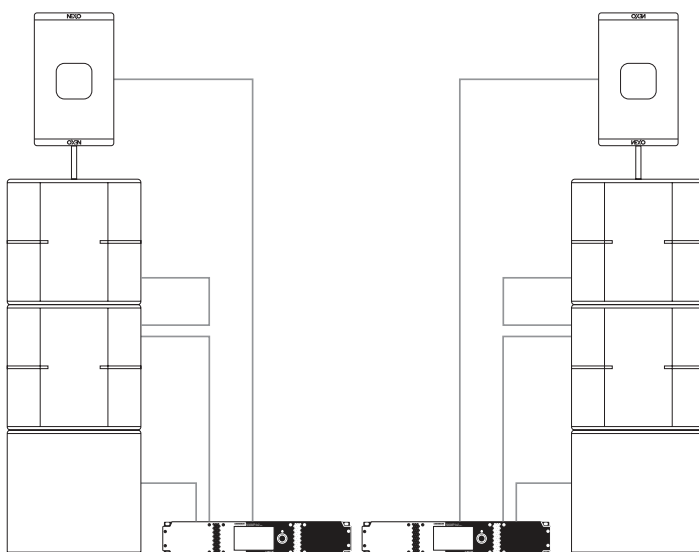


Mid-Sized FOH System: (Per side) 1 x P12 (Active) on 2 x L15
Subs on 1 x L15 Sub (Cardioid Mode)

P15 Recommended Systems


NXAMP4X2MK2 delivers the perfect power and processing solution for P15/L18 systems in a variety of configurations

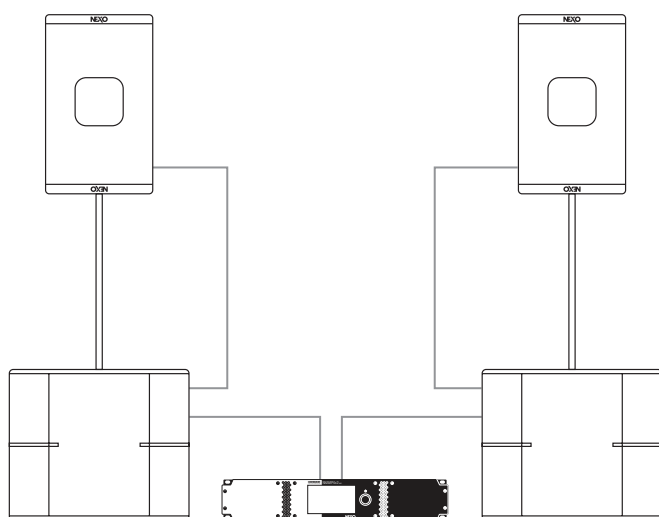


Stereo System: 1 x P15 (Passive) with pole stand on 1 x L18 Sub per side, powered by 1 x NXAMP4X2MK2

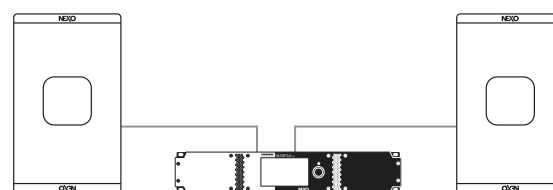

Active System: Stereo, 1 x P15 (Active) per side, powered by 1 x NXAMP4X2MK2

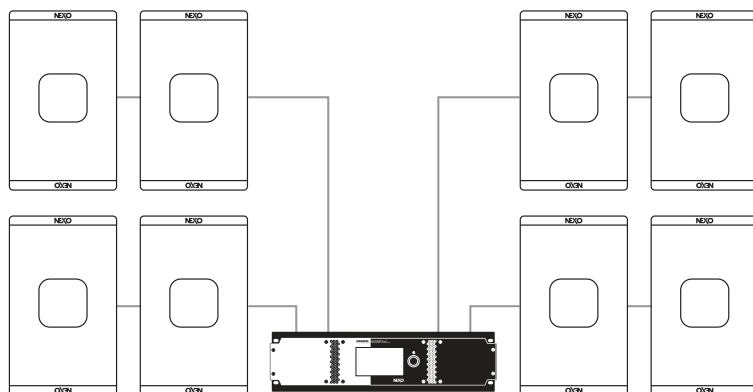

Distributed System: 8 x P15 (Passive), powered by 1 x NXAMP4X4MK2

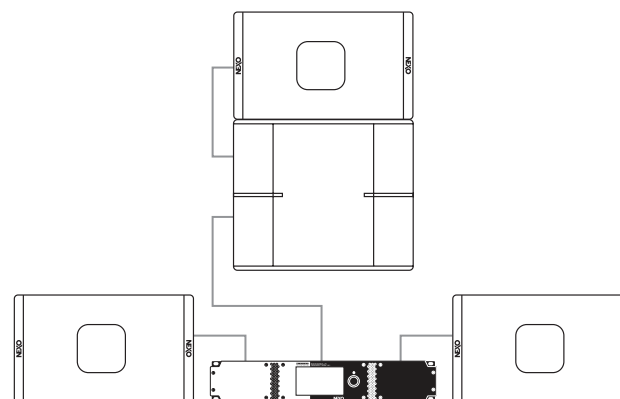

Monitor System: P15 wedge on 1 x L18 (Drum Fill) + 2 x P15 wedges, powered by 1 x NXAMP4X2MK2



System configuration, management and remote control software


NEXO software applications make it easy to design, configure and implement P+ Series systems in mobile and fixed installations.

NeMo

NeMo System Management software delivers remote control of a NEXO DTD/DTDAMP or NXAMP_{mk2}-powered system from a Windows, macOS or iOS device. Managing and positioning devices, monitoring their parameters (levels, etc.), and setting new values (preset, volume, delay, EQ, etc.) are all made possible via an attractive and intuitive user interface. NeMo also includes a powerful engine for logging and alerting.

ProVisionaire


NXAMP_{mk2} - powered P+ systems can also be controlled directly from Yamaha digital mixing consoles and are included in Yamaha's ProVisionaire control and monitoring software for installed systems.

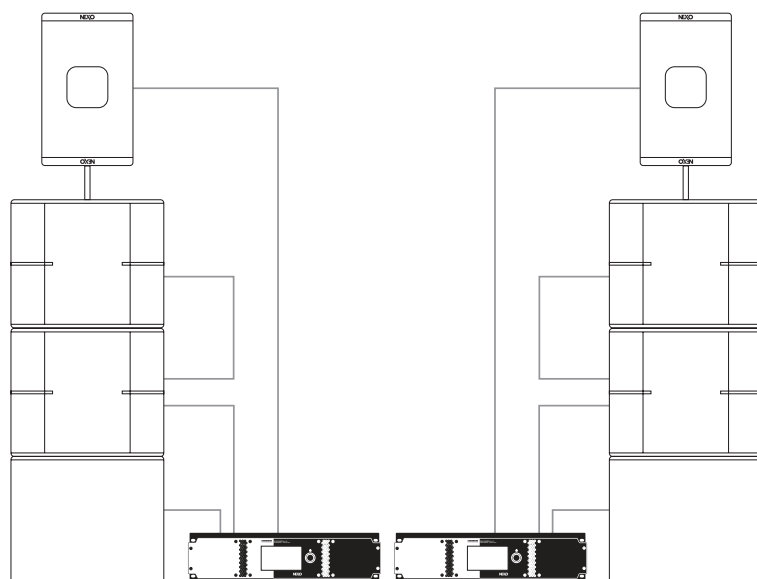


Mid-Sized FOH System: (Per side) 1 x P15 (Active) on 2 x L18 Subs on 1 x L18 Sub (Cardioid Mode), powered by 2 x NXAMP4X4MK2

P18 Recommended Systems


NXAMP4X4MK2 delivers the perfect power and processing solution for P18/L20 systems in a variety of configurations

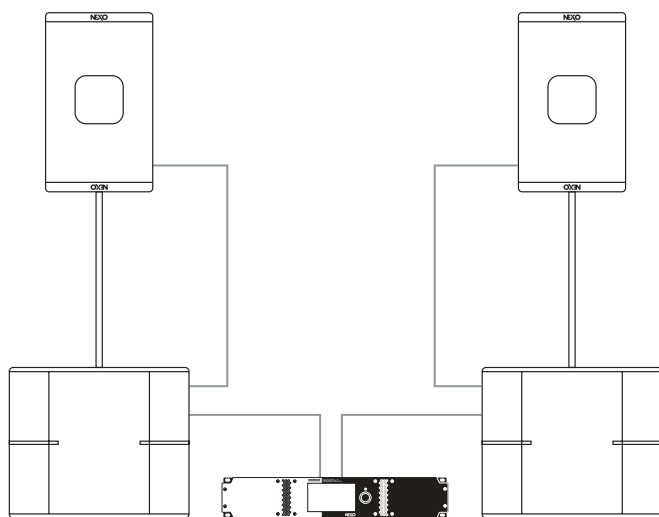


Stereo System: 1 x P18 (Passive) with pole stand on 1 x L20 Sub per side, powered by 1 x NXAMP4X4MK2

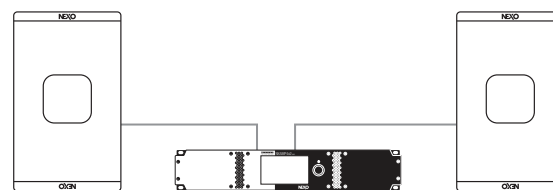


Active System: Stereo, Stereo, 1 x P18 (Active) per side, powered by 1 x NXAMP4X2MK2

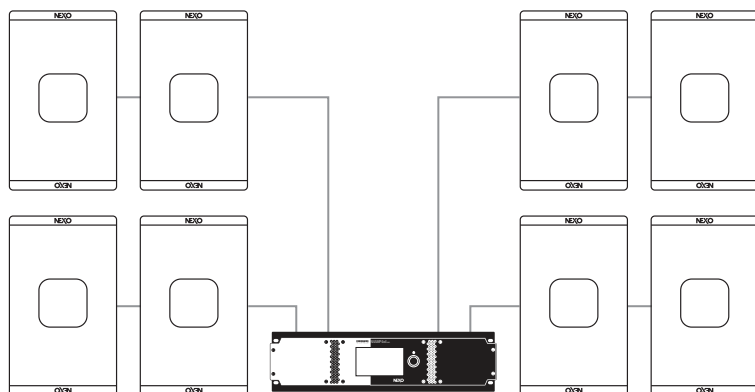

Distributed System: 8 x P18 (Passive) powered by 1 x NXAMP4X4MK2

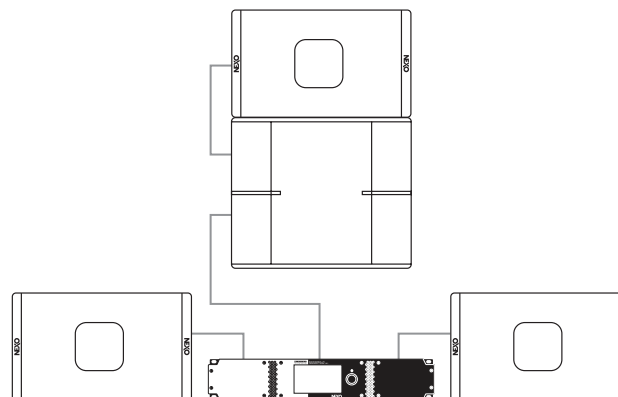

Monitor System: P18 wedge on 1 x L20 (Drum Fill) + 2 x P18 wedges, powered by 1 x NXAMP4X4MK2

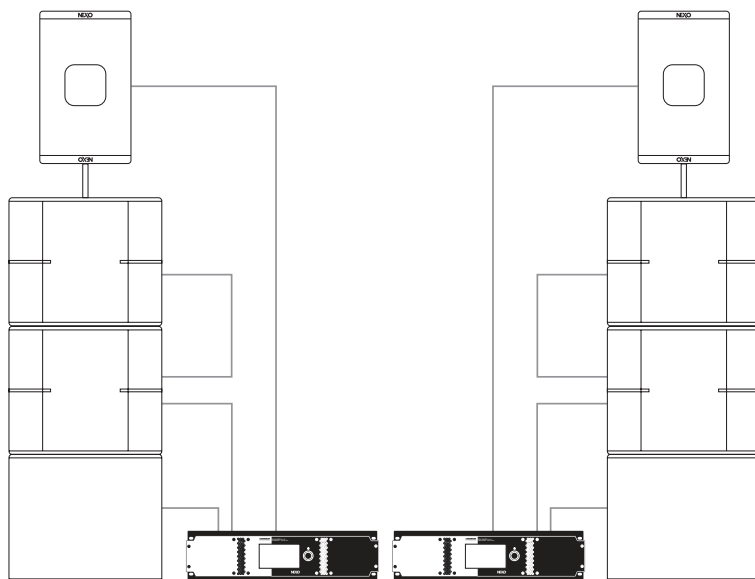

FOH System: (Per side) 1 x P18 (Passive) on 2 x L20 Subs on 1 x L20 Sub
(Cardioid Mode), powered by 2 x NXAMP4X4MK2


P12 / P15 / P18 active and passive modes

Touring and TIS versions of the P12, P15 and P18 cabinets incorporate an Active/Passive switch. In Passive mode, a passive circuit filters a single channel of amplification appropriately for the high and low frequency drivers. In active mode, an active crossover filters two independent amplification channels, resulting in even higher SPL performance of 140dB, 141dB and 142dB respectively for the P12, P15 and P18, along with reduced distortion and enhanced dispersion around the crossover frequencies.



P+ Series Mounting Accessories



Horizontal Mount

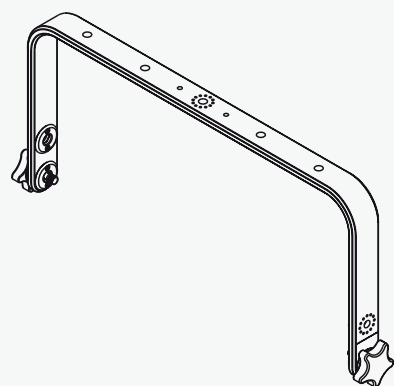

For P8: VNU-HBRK425
For P10: VNU-HBRK500
For P12: VNU-HBRK535
For P15: VNU-HBRK600
For P18: VNU-HBRK680



Can be used with:

Truss
Clamp





Wall
Mount*

For P8: VNI-WM200
For P10: VNI-WM280
For P12: VNI-WM330
For P15: VNI-WM380
For P18: VNI-WM450





Ceiling
Mount

For P8, P10, P12, P15, P18:
VNI-CLADAPT




Pole
Stand

For P8, P10, P12, P15, P18:
VNU-PLADAPT





Vertical Mount

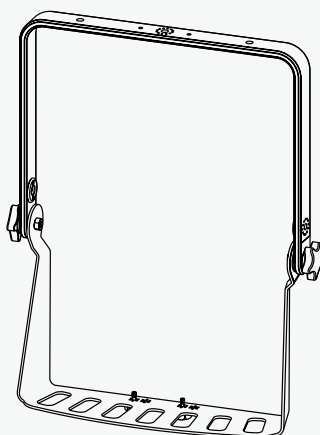

For P8: PNU-VBRK8
For P10: PNU-VBRK10
For P12: PNU-VBRK12
For P15: PNU-VBRK15
For P18: PNU-VBRK18



Can be used with:

Truss
Clamp




Wall
Mount*

For P8: VNI-WM200
For P10: VNI-WM280
For P12: VNI-WM330
For P15: VNI-WM380
For P18 : VNI-WM450




Ceiling
Mount

For P8, P10, P12, P15, P18:
VNI-CLADAPT



Pole
Stand


For P8, P10, P12, P15, P18:
VNU-PLADAPT




* VNI-WM wall mountings are cross-compatible across all P+ cabinets. See dedicated documentation for maximum angle for specific VNI-WM / P+ cabinet pairings.

Bumper Mount


Can be used with:




For P8, P10, P12, P15, P18:
VNU-BUMP




Adapter
+ Truss
Clamp



For P8, P10, P12, P15, P18:
VNI-WMADAPT




Adapter
+ Wall
Mount



For P8, P10, P12,
P15, P18:
VNI-WMADAPT


For P8: VNI-WM200
For P10: VNI-WM280
For P12: VNI-WM330
For P15: VNI-WM380
For P18: VNI-WM450



L15, L18 and L20 Mounting Accessories



Horizontal Mount

Can be used with:





For L15: LNT-HBRK15
For L18: LNT-HBRK18
For L20: LNT-HBRK20


Truss
Clamp




Ceiling
Mount

For L15, L18, L20:
VNI-CLADAPT




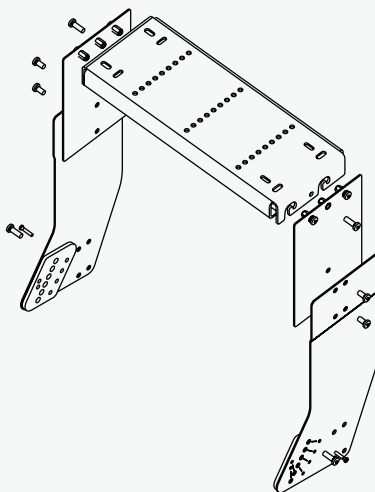


For 1 x P12 / 1 x L15:
PNI-P12T0L15



For 1 x P12 / 2 x L15:
PNI-P12T02L15



For 3 x L15:
LNI-3L15




A powerful, full range cluster that saves available floor space


P12/L15, P15/L18, P18/L18 and P18/L20 clusters

The PNI-P12TOL15 creates a high power density full range point source system for mid-throw applications. It can combine a P12 under a L15 (with selectable angle between the two cabinets) or 2x L15 (eventually one being reversed for Cardioid applications). Eye bolts or truss clamp can be used on the top plate to hang the system, or the top plate can directly be screwed into a ceiling.


For 1 x P15 / 1 x L18:
PNI-P15TOL18




For 1 x P18 / 1 x L18:
PNI-P18TOL18




For 1 x P18 / 1 x L20:
PNI-P18TOL20




For 1 x P15 / 2 x L18:
PNI-P15T02L18




For 1 x P18 / 2 x L18:
PNI-P18T02L18




For 1 x P18 / 2 x L20:
PNI-P18T02L20




For 3 x L18:
LNI-3L18




For 3 x L18:
LNI-3L18



For 3 x L20:
LNI-3L20



Optional Magnetic Horns and Flanges

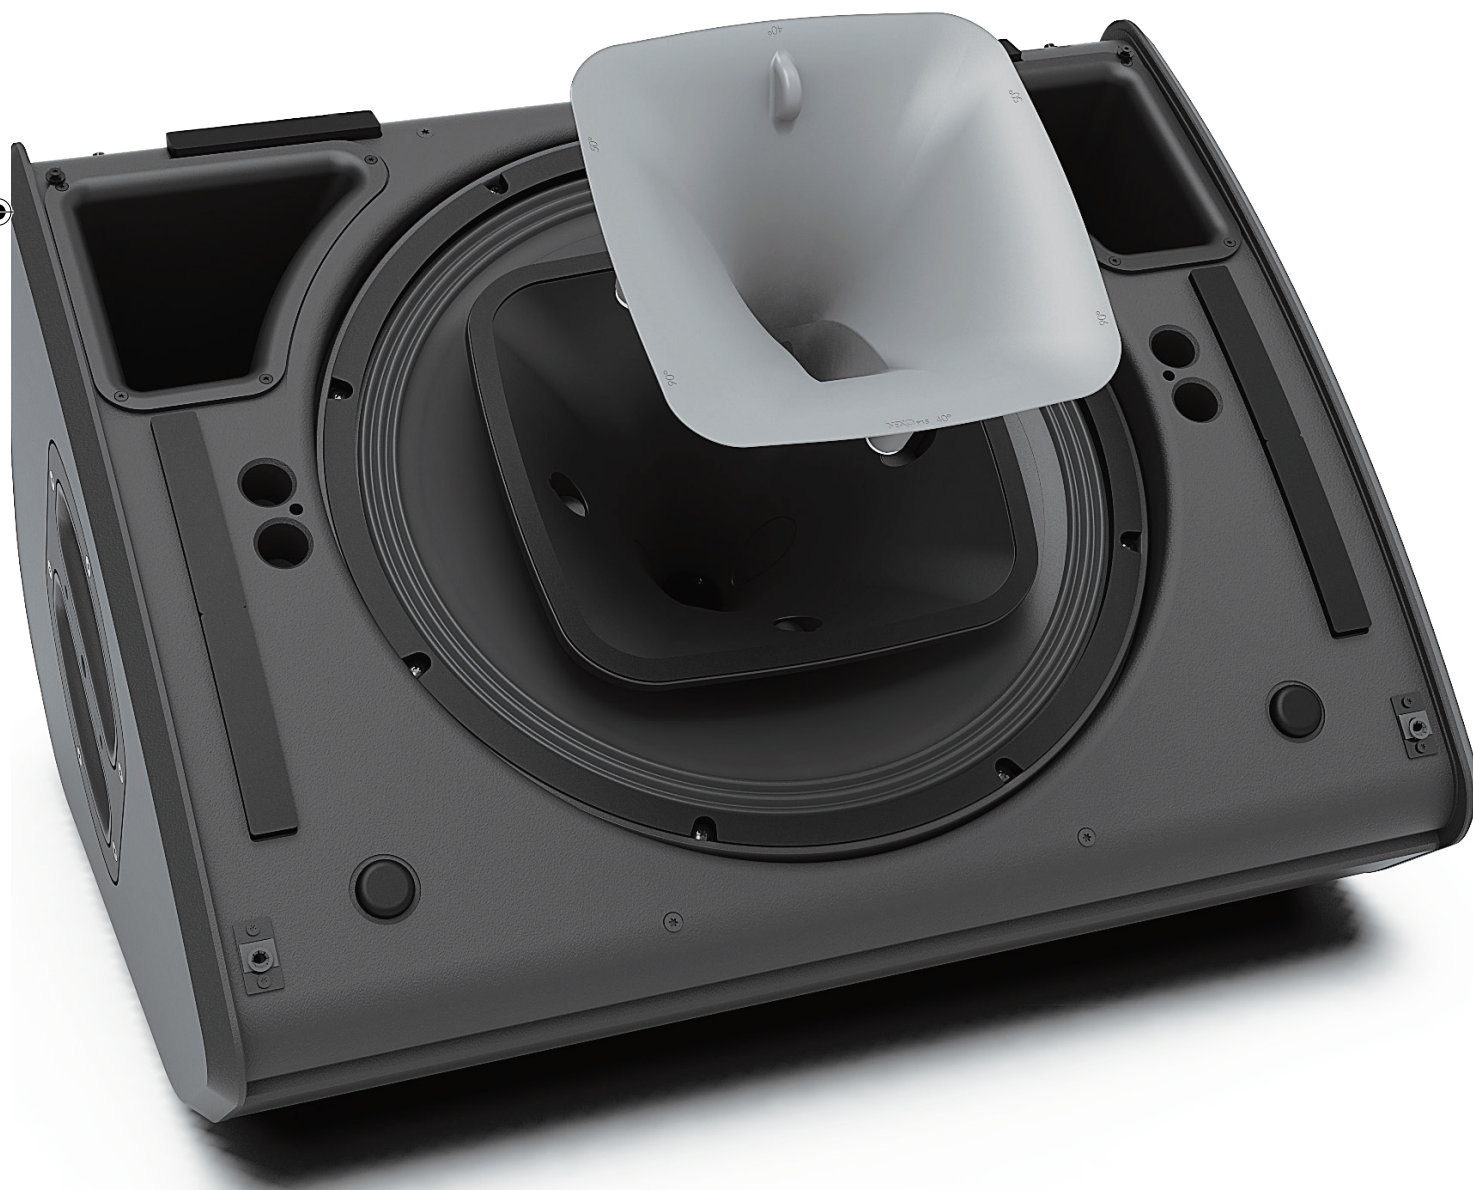



P8 Optional Magnetic Horns

By default, the P8 also uses a 100° x 100° horn. The dispersion characteristics can be changed by fitting an optional, rotatable 110° x 60° horn.



PNU-P8FLG11060

Standard P8 Horn



Standard P10 Horn

PNU-P10FLG11060

P10 Optional Magnetic Horns

By default, the P10 uses a 100° x 100° horn. The dispersion characteristics can be changed by fitting an optional, rotatable 110° x 60° horn.

P12 Optional Magnetic Flanges

The dispersion characteristics of the P12 can be changed in seconds through the addition of optional magnetic flanges. The standard cabinet uses a 60° x 60° horn with additional 90° x 40° and Asymmetrical (PS Type) 60° - 100° x 40° also available.



PNU-P12FLG9040

Standard P12 Horn

PNU-P12FLGPS



PNU-P15FLG9040

Standard P15 Horn

PNU-P15FLGPS

P15 Optional Magnetic Flanges

The dispersion characteristics of the P15 can be changed in seconds through the addition of optional magnetic flanges. The standard cabinet uses a 60° x 60° horn with additional 90° x 40° and Asymmetrical (PS Type) 50° ~ 90° x 40° also available.

P18 Optional Magnetic Flanges

The dispersion characteristics of the P18 can be changed in seconds through the addition of optional magnetic flanges. The standard cabinet uses a 60° x 60° horn with additional 90° x 40° and Asymmetrical (PS Type) 50° - 90° x 40° also available.



PNU-P18FLG9040

Standard P18 Horn

PNU-P18FLGPS

Flight Cases and Covers

The P+ Series includes a comprehensive range of flight cases and covers, including cases for accessories.



- PNT-4CASE8** Flight case for 4 x P8
- PNT-2CASE10** Flight case for 2 x P10
- PNT-2CASE12** Flight case for 2 x P12
- PNT-2CASE15** Flight case for 2 x P15
- PNT-2CASE18** Flight case for 2 x P18

- PNT-ACC8** Flight case for 4 x set of P8 accessories, one set includes : 1 optional horn, Bumper, Pole stand adapter, vertical bracket, horizontal bracket.
- PNT-ACC10** Flight case for 2 x set of P10 accessories, one set includes : 1 optional horn, Bumper, Pole stand adapter, vertical bracket, horizontal bracket.
- PNT-ACC12** Flight case for 2 x set of P12 accessories, one set includes : 2 types of Flanges, Bumper, Pole stand adapter, vertical bracket, horizontal bracket.
- PNT-ACC15** Flight case for 2 x set of P15 accessories, one set includes : 2 types of Flanges, Bumper, Pole stand adapter, vertical bracket, horizontal bracket.
- PNT-ACC18** Flight case for 2 x set of P18 accessories, one set includes : 2 types of Flanges, Bumper, Pole stand adapter, vertical bracket, horizontal bracket.



PNT-COV8 Cover for P8
PNT-COV10 Cover for P10
PNT-COV12 Cover for P12
PNT-COV15 Cover for P15
PNT-COV18 Cover for P18

LNT-2CASE15 Flight case for 2 x L15
LNT-COV15 Cover for L15
LNT-COV18 Cover for L18
LNT-COV20 Cover for L20
LNT-WB15 Wheel board for L15
LNT-WB18 Wheel board for L18
LNT-WB20 Wheel board for L20

Specifications



P8 cab in main (vertical) and wedge (horizontal) configurations

+P8

P8 with NEXO processing	
Frequency Response (-6 dB)	66 Hz to 20 kHz
Sensitivity 1W@1m	101 dB SPL Nominal
Peak SPL Level (1m)	129 dB Peak
Recommended Power	350 to 550 Watts / 8 Ohms
HF Dispersion (according to horn)	100°x100° (Default) - 110°x60° (with 110°x60° optional horn)
Crossover Frequency	66 Hz, 85 Hz, 120 Hz
Nominal Impedance	8Ω
Product Features	
Components	1 x Coaxial LF 8" 8 Ohms long excursion & Neodymium HF 1.5" 8 Ohms
Number of ways	2 ways passive
Connectors (Touring and TIS versions)	4 x NL4, 4 poles connectors (1 per handle + 2 at the back)
Connectors (Install version)	1 x Cable gland with 2 cores cable
Rigging points	1 x universal accessory fit on each side + 1 x on the bottom
Material	Custom made bent plywood of baltic birch and poplar
Finish	Black or White structural paint
Front Finish (Touring version)	Magnelis® steel front grille + back mesh
Front Finish (Install and TIS versions)	UV resistant acoustic fabric fitted front grill
Height x Width x Depth	423 mm x 276 mm x 250 mm (16.7" x 10.9" x 9.8")
Weight: Net	12 kg (26.5 lbs)
Operating temperature range	0°C - 40 °C (32° F - 104° F)
Storage temperature range	-20 °C - 60 °C (-4 °F - 140° F)
System Operation	
Recommended powering solution	NXAMP4X1MK2 Powered TDcontroller: up to 3xP8 per channel
Optional powering solution	DTDcontroller + DTDAMP4x0.7 : up to 2xP8 per channel NXAMP4x2MK2 Powered TDcontroller: up to 4xP8 per channel NXAMP4x4MK2 Powered TDcontroller: up to 4xP8 per channel



P10 cab in main (vertical) and wedge (horizontal) configurations

+P10

P10 with NEXO processing	
Frequency Response (-6 dB)	63 Hz to 20 kHz
Sensitivity 1W@1m	107 dB SPL Nominal
Peak SPL Level (1m)	136 dB Peak
Recommended Power	550 to 870 Watts / 8 Ohms
HF Dispersion (according to horn)	100°x100° (Default) - 110°x60° (with 110°x60° optional horn)
Crossover Frequency	63 Hz, 85 Hz, 120 Hz
Nominal Impedance	8Ω
Product Features	
Components	1 x Coaxial Neodymium LF 10" 8 Ohms long excursion & HF 1.7" 8 Ohms
Number of ways	2 ways passive
Connectors (Touring and TIS versions)	4 x NL4, 4 poles connectors (1 per handle + 2 at the back)
Connectors (Install version)	1 x Cable gland with 2 cores cable
Rigging points	1 x universal accessory fit on each side + 1 x on the bottom
Material	Custom made bent plywood of baltic birch and poplar
Finish	Black or White structural paint
Front Finish (Touring version)	Magnelis® steel front grille + back mesh
Front Finish (Install and TIS versions)	UV resistant coustic fabric fitted front grill
Height x Width x Depth	497 mm x 384 mm x 274mm (19.6" x 15.2" x 10.8")
Weight: Net	15 kg (33 lbs)
Operating temperature range	0°C - 40 °C (32° F - 104° F)
Storage temperature range	-20 °C - 60 °C (-4 °F - 140° F)
System Operation	
Recommended powering solution	NXAMP4X1MK2 Powered TDcontroller: 1xP10 per channel
Optional powering solution	DTDcontroller + DTDAMP4x1.3 : up to 2xP10 per channel NXAMP4x2MK2 Powered TDcontroller: up to 4xP10 per channel NXAMP4x4MK2 Powered TDcontroller: up to 4xP10 per channel



P12 cab in main (vertical) and wedge (horizontal) configurations

+P12

P12 with NEXO processing	
Frequency Response (-6 dB)	60 Hz - 20 kHz
Sensitivity 1W@1m	107 dB
Peak SPL Level (1m)	138dB Peak (Passive mode) / 140dB Peak (Active mode)
Recommended Power	800 to 1270 Watts / 8 Ohms
HF Dispersion (according to flanges)	60°x60° (Default) - 90°x40° (with 90x40 flange) - 60°~100°x40° (with PS flange)
Crossover Frequency	60 Hz, 85 Hz, 120 Hz
Nominal Impedance	Active mode (8Ω LF, 8Ω HF) – Passive mode: 8Ω
Product Features	
Components	1 x Coaxial Neodymium LF 12" 8 Ohms long excursion & HF 3" 8 Ohms
Number of ways (Touring and TIS versions)	2 ways passive (2+2 P12) or 2 ways active (1+1 LF, 2+2 HF) switchable
Number of ways (Install version)	2 ways passive
Connectors (Touring and TIS versions)	4 x NL4, 4 poles connectors (1 per handle + 2 at the back)
Connectors (Install version)	1 x Cable gland with 2 cores cable
Rigging points	1 x universal accessory fit on each side + 1 x on the bottom
Material	Custom made bent plywood of baltic birch and poplar
Finish	Black or white structural paint
Front Finish (Touring)	Steel front grille + Black mesh
Front Finish (Install and TIS versions)	Acoustic fabric fitted front grill
Height x Width x Depth	534mm x 432mm x 314mm (21.0" x 17.0" x 12.3")
Weight: Net	20 kg (44 lbs)
Operating temperature range	0°C - 40°C (32°F - 104°F)
Storage temperature range	-20°C - 60°C (-4°F - 140°F)
System Operation	
Recommended powering solution	NXAMP4X2MK2 Powered TDcontroller: up to 2xP12 per channel
Optional powering solution	DTDcontroller + DTDAMP4x0.7 (Bridged) : 1xP12 per channel NXAMP4x1MK2 Powered TDcontroller (Bridged): up to 2xP12 per channel NXAMP4x4MK2 Powered TDcontroller: up to 4xP12 per channel



P15 cab in main (vertical) and wedge (horizontal) configurations

+P15

P15 with NEXO processing	
Frequency Response (-6 dB)	
57 Hz - 20 kHz	
Sensitivity 1W@1m	
108 dB SPL Nominal	
Peak SPL Level (1m)	
139 dB Peak (Passive mode) / 141 dB Peak (Active mode)	
Recommended Power	
850 to 1350 Watts / 8 Ohms	
HF Dispersion (according to flanges)	
60°x60° (Default) - 90°x40° (with 90x40 flange) - 50°~90°x40° (with PS flange)	
Crossover Frequency	
57 Hz, 85 Hz, 120 Hz	
Nominal Impedance	
Active mode: (8 Ω LF + 8 Ω HF) / Passive mode: 8 Ω	
Product Features	
Components	
1 x Coaxial Neodymium LF 15" 8 Ohms long excursion & HF 3" 8 Ohms	
Number of ways (Touring and TIS versions)	
2 ways passive (2+/- P15) or 2 ways active (1+/- LF, 2+/- HF) switchable	
Number of ways (Install version)	
2 ways passive	
Connectors (Touring and TIS versions)	
4 x NL4, 4 poles connectors (1 per handle + 2 at the back)	
Connectors (Install version)	
1 x Cable gland with 2 cores cable	
Rigging points	
1 x universal accessory fit on each side + 1 x on the bottom	
Material	
Custom made bent plywood of baltic birch and poplar	
Finish	
Black or white structural paint	
Front Finish (Touring version)	
Steel front grille + Black mesh	
Front Finish (Install and TIS versions)	
Acoustic fabric fitted front grill	
Height x Width x Depth	
600mm x 483mm x 352 mm (23.6" x 19.0" x 13.9")	
Weight: Net	
23 kg (51 lbs)	
Operating temperature range	
0°C - 40 °C (32° F - 104° F)	
Storage temperature range	
-20 °C - 60 °C (-4 ° F - 140° F)	
System Operation	
Recommended powering solution	
NXAMP4x2MK2 Powered TDcontroller: up to 2 x P15 per channel	
Optional powering solution	
DTDcontroller + DTDAMP4x0.7 (Bridged) : 1 x P15 per channel	
NXAMP4x1MK2 Powered TDcontroller (Bridged): up to 2 x P15 per channel	
NXAMP4x4MK2 Powered TDcontroller: up to 4 x P15 per channel	




P18 cab in main (vertical) and wedge (horizontal) configurations

+P18

P18 with NEXO processing	
Frequency Response (-6 dB)	
50 Hz - 20 kHz	
Sensitivity 1W@1m	
107 dB SPL Nominal	
Peak SPL Level (1m)	
140 dB Peak (Passive mode) / 142 dB Peak (Active mode)	
Recommended Power	
1200 to 1900 Watts / 8 Ohms	
HF Dispersion (according to flanges)	
60°x60° (Default) - 90°x40° (with 90x40 flange) - 50°~90°x40° (with PS flange)	
Crossover Frequency	
50 Hz, 85 Hz, 120 Hz	
Nominal Impedance	
Active mode: (8 Ω LF + 8 Ω HF) / Passive mode: 8 Ω	
Product Features	
Components	
1 x Coaxial Neodymium LF 18" 8 Ohms long excursion & HF 4" 8 Ohms	
Number of ways (Touring and TIS versions)	
2 ways passive (2+/- P18) or 2 ways active (1+/- LF, 2+/- HF) switchable	
Number of ways (Install version)	
2 ways passive	
Connectors (Touring and TIS versions)	
4 x NL4, 4 poles connectors (1 per handle + 2 at the back)	
Connectors (Install version)	
1 x Cable gland with 2 cores cable	
Rigging points	
1 x universal accessory fit on each side + 1 x on the bottom	
Material	
Custom made bent plywood of baltic birch and poplar	
Finish	
Black or white structural paint	
Front Finish (Touring version)	
Steel front grille + Black mesh	
Front Finish (Install and TIS versions)	
Acoustic fabric fitted front grill	
Height x Width x Depth	
680mm x 579mm x 446 mm (26.8" x 22.8" x 17.6")	
Weight: Net	
33 kg (73 lbs)	
Operating temperature range	
0°C - 40 °C (32° F - 104° F)	
Storage temperature range	
-20 °C - 60 °C (-4 ° F - 140° F)	
System Operation	
Recommended powering solution	
NXAMP4x4MK2 Powered TDcontroller: up to 3 x P18 per channel	
Optional powering solution	
DTDcontroller + DTDAMP4x0.7 (Bridged) : 1 x P18 per bridged channels	
NXAMP4x1MK2 Powered TDcontroller (Bridged): up to 2 x P18 per bridged channels	
NXAMP4x2MK2 Powered TDcontroller: 1 x P18 per channel	


Specifications



L15 sub

L15


L15 with NEXO processing
Frequency Response (-6 dB) 40 Hz - 120 Hz
Peak SPL Level (1m) 139 dB Peak
Recommended Amplifiers 850 to 1350 Watts / 4 Ohms
Crossover Frequency 85 Hz, 120 Hz
Nominal Impedance 4Ω
Product Features
Components 1x 15" – 4 ohms – Long excursion – Neodymium driver
Connectors 2x NL4, 4 poles connectors
Rigging points 1 x universal accessory fit on each side + 1 x M20 thread for Pole Stand on top
Material Custom made bent plywood of baltic birch and poplar
Finish Black or white structural paint
Front Finish Steel front grille
Height x Width x Depth 439mm x 550mm x 650 mm (17.3" x 21.7" x 25.6")
Weight 35 kg (77 lbs)
Operating temperature range 0°C - 40 °C (32° F - 104° F)
Storage temperature range -20 °C - 60 °C (-4 ° F - 140° F)
System Operation
Recommended powering solution NXAMP4x2MK2 Powered TDcontroller: up to 2 x L15 per channel
Optional powering solution DTD + DTDAMP4x1.3: 1 x L15 per channel NXAMP4x1MK2 Powered TDcontroller: 1 x L15 per channel NXAMP4x4MK2 Powered TDcontroller: up to 2 x L15 per channel

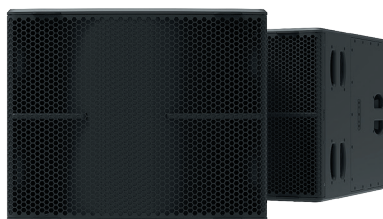

L18 sub

L18

L18 with NEXO processing
Frequency Response (-6 dB) 32 Hz - 120 Hz
Peak SPL Level (1m) 140 dB Peak
Recommended Amplifiers 1550 to 2460 Watts / 4 Ohms
Crossover Frequency 60 Hz, 85 Hz, 120 Hz
Nominal Impedance 4Ω
Product Features
Components 1 x Neodymium 18" 4 Ohms long excursion
Connectors 2 x NL4, 4 poles connectors
Rigging points 1 x universal accessory fit on each side + 1 x M20 thread for Pole Stand on top
Material Custom made bent plywood of baltic birch and poplar
Finish Black or white structural paint
Front Finish Steel front grille
Height x Width x Depth 559mm x 680mm x 775 mm (22.0" x 26.8" x 30.5")
Weight 50 kg (110 lbs)
Operating temperature range 0°C - 40 °C (32° F - 104° F)
Storage temperature range -20 °C - 60 °C (-4 ° F - 140° F)
System Operation
Recommended powering solution NXAMP4x2MK2 Powered TDcontroller: 1 x L18 per channel
Optional powering solution NXAMP4x1MK2 Powered TDcontroller (Bridged): 1 x L18 per channel NXAMP4x4MK2 Powered TDcontroller: up to 2 x L18 per channel

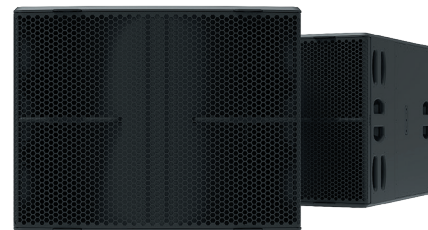

L20 sub

L20

L20 with NEXO processing
Frequency Response (-6 dB) 28 Hz - 120 Hz
Peak SPL Level (1m) 141 dB Peak
Recommended Amplifiers 2100 to 3300 Watts / 4 Ohms
Crossover Frequency 60 Hz, 85 Hz, 120 Hz
Nominal Impedance 4Ω
Product Features
Components 1 x Neodymium 20" 4 Ohms long excursion
Connectors 2 x NL4, 4 poles connectors
Rigging points 1 x universal accessory fit on each side + 1 x M20 thread for Pole Stand on top
Material Custom made bent plywood of baltic birch and poplar
Finish Black or white structural paint
Front Finish Steel front grille
Height x Width x Depth 594mm x 755mm x 905mm (23.4" x 29.7" x 35.6")
Weight 59 kg (130 lbs)
Operating temperature range 0°C - 40 °C (32° F - 104° F)
Storage temperature range -20 °C - 60 °C (-4 ° F - 140° F)
System Operation
Recommended powering solution NXAMP4x4MK2 Powered TDcontroller: Up to 2 x L20 per channel
Optional powering solution NXAMP4x1MK2 Powered TDcontroller (Bridged): 1 x L20 per channel NXAMP4x2mk2 Powered TDcontroller (Bridged): 1 x L20 per channel





series

NEXO
Parc d'Activité
du Pré de la Dame Jeanne
B.P.5
60128 Plailly
FRANCE
Tel: +33 (0)3 44 99 00 70
Fax: +33 (0)3 44 99 00 30
E-mail: info@nexo.fr



nexo-sa.com

Thinking. Inside the box.

NEXO | A
Yamaha
Group
Company

