


Fixed Bracket ID24

(only used with ID24-I with the last 6 digits of the serial number $\geq 200\ 000$)

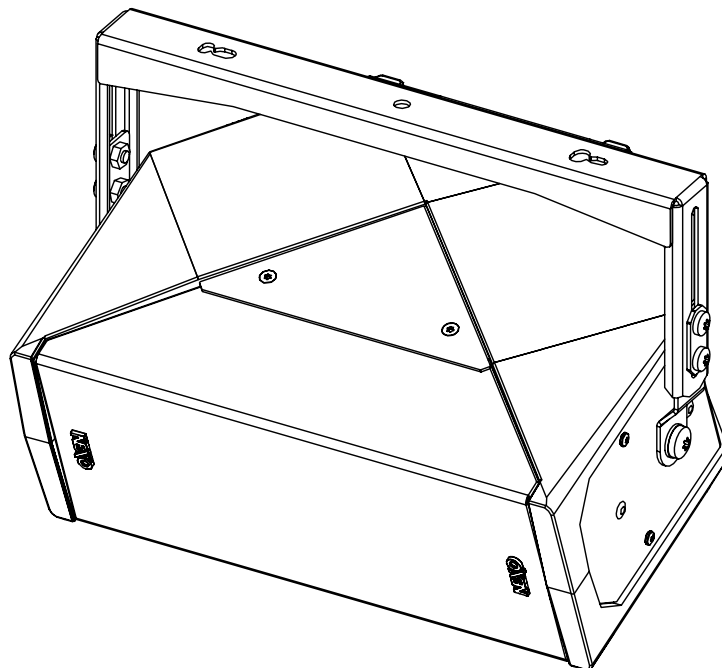

Contents:

| | | |
|-----------|----------------------------------|--------------------------|
| <p>X1</p> | <p>X2 VXTCBX812N (M8x12)</p> | <p>X2 VRA8N (M8)</p> |
|-----------|----------------------------------|--------------------------|

Weight: 0.6 kg / 1.32 lb




nexo-sa.com
ZA du Pre de la Dame Jeanne
60128 PLAILLY - France

- Read this document before using.
- Keep this document.
- Observe all warnings and cautions.



Dimensions:

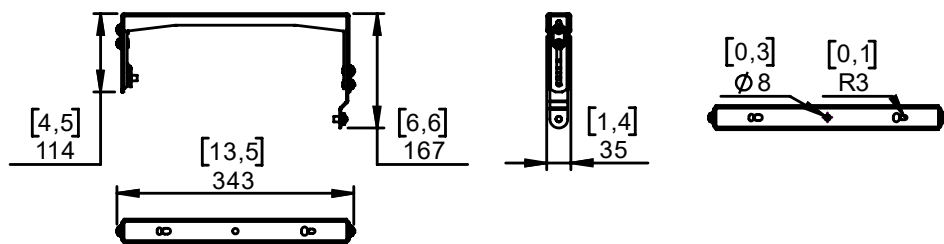

Implementation:

| | |
|--|--|
| <p>Place HBRK24 on ID24 with screws M8x12 (Tx40) and washer M8. (use only fasteners provided).</p> | <p>Adjust the angle, tight properly.</p> |
| <p>Diagram showing the HBRK24 component being attached to the ID24 unit. A blue arrow points to the mounting holes on the ID24 unit.</p> | <p>Diagram showing the HBRK24 component being adjusted to the correct angle. A blue curved arrow indicates the adjustment.</p> |

Use:

| | | |
|--|---|--|
| <p>Loosen the screws (Tx30) on the sides, adjust ID24, tight properly.</p> | | |
| <p>Diagram showing the HBRK24 component being loosened. A blue double-headed arrow indicates the adjustment.</p> | <p>Diagram showing the HBRK24 component being adjusted.</p> | <p>Diagram showing the HBRK24 component being tightened.</p> |

- NEXO cannot accept responsibility for accidents caused by any factor other than defects in this product itself.
- Please check the web site nexo-sa.com for the latest update.



nexo-sa.com
 ZA du Pre de la Dame Jeanne
 60128 PLAILLY - France

- Read this document before using.
- Keep this document.
- Observe all warnings and cautions.

