

DP1146/Rev02 - DI

## **Single Column Top Rigging**

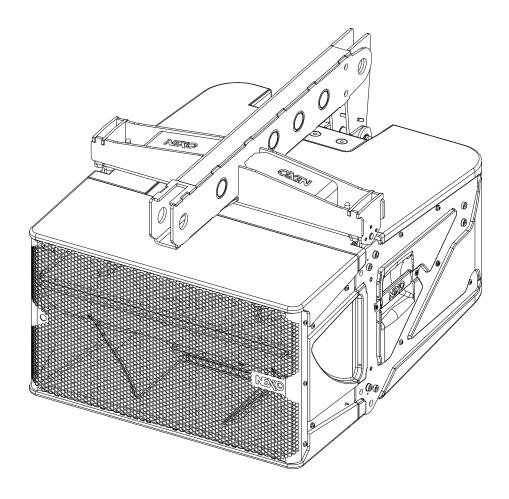

### **Contents:**




Weight: 16 kg / 35 lb



- Read this document before using.
- Keep this document.
- Observe all warnings and cautions.




#### **Dimensions:**



#### Use:

- Insert XBOW into the 3 fixing points: 2 on the sides and one at the back of the STM module
- Lock the lateral spring pins located inside the XBOW to the front lateral holes of the STM module.
- Insert the quick release pin at the back, in the hole located at the back of the STM module.

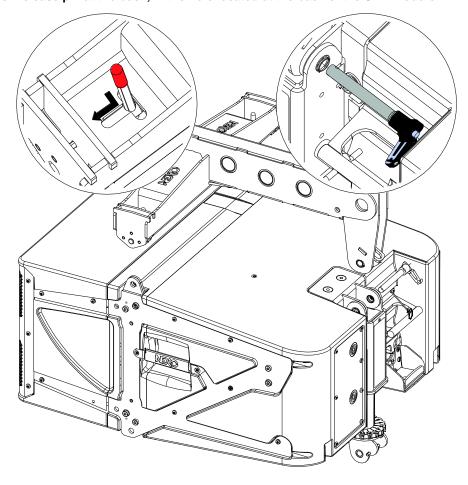

# ENSURE XBOW LATERAL SPRING PINS AND REAR QUICK RELEASE PIN ARE PROPERLY LOCKED INTO TOP CABINET

- NEXO cannot accept responsibility for accidents caused by any factor other than defects in this product itself.
- Please check the web site <u>nexo-sa.com</u> for the latest update.





- Keep this document.

- Observe all warnings and cautions.

