



Stacking Adapter MSUB18 – GEOM10/MSUB15

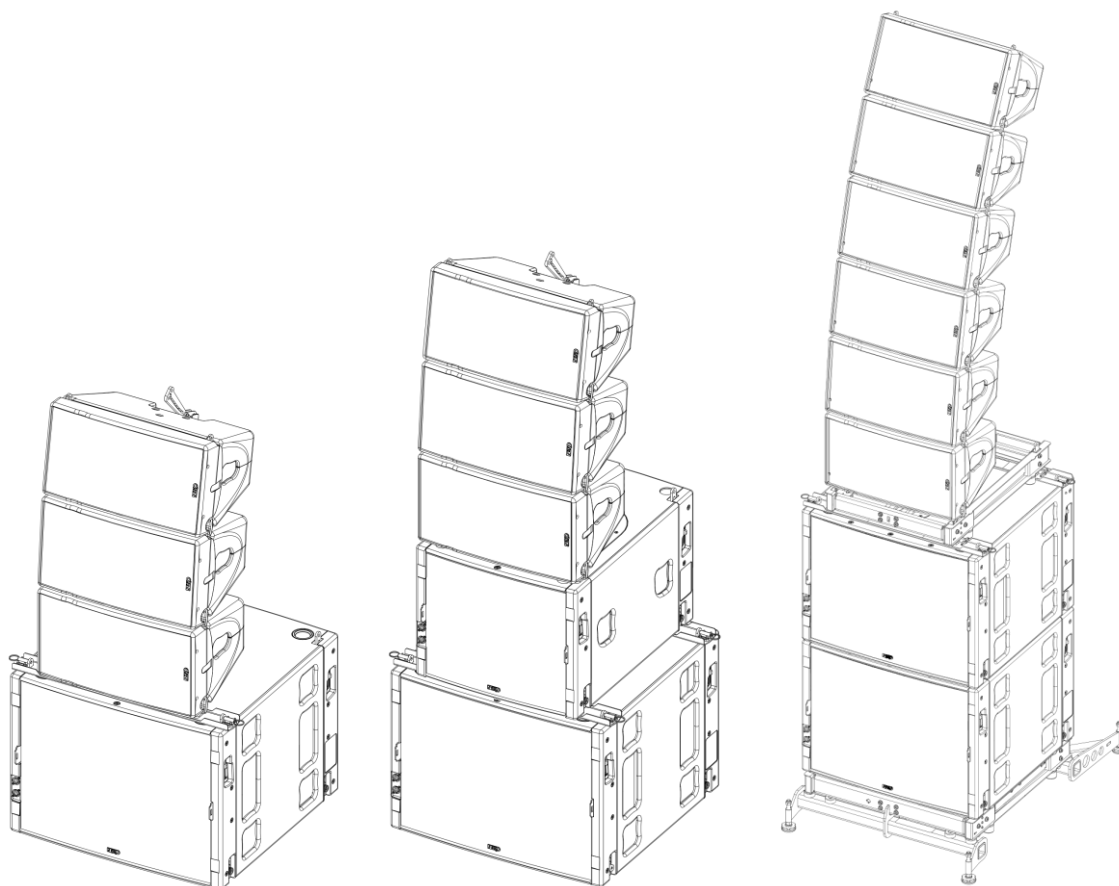

Contents:

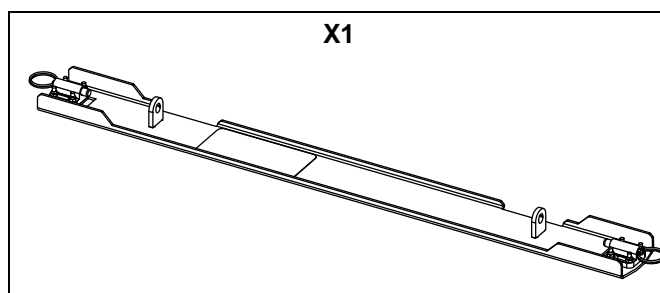





Weight: 1.5 kg / 3.3 lb

Dimensions:




Check the way of use by the arrows on the sticker.

- Use:
- With GEOM10 (3x GEOM10 max)

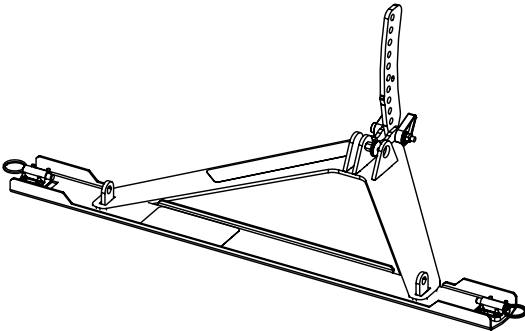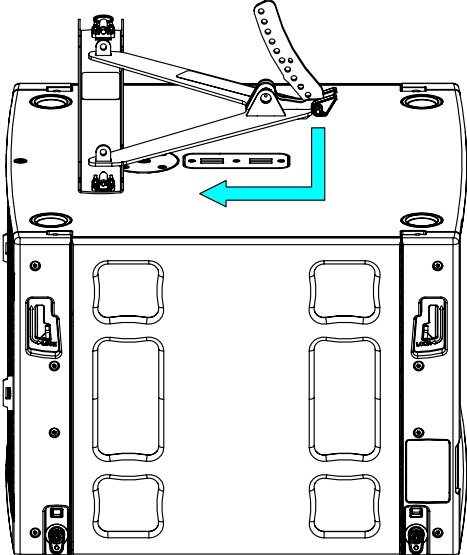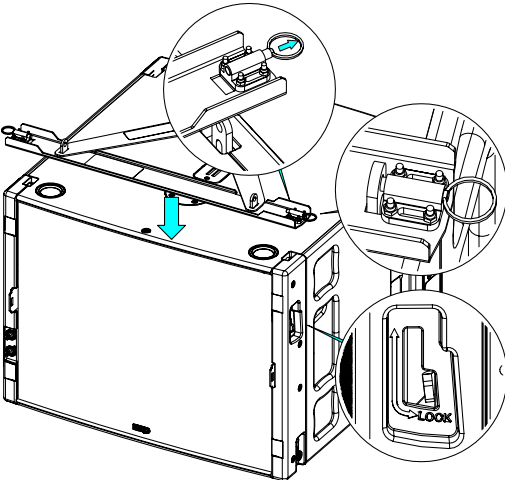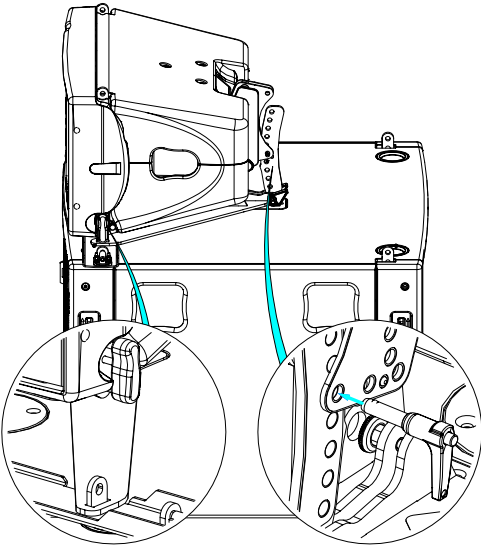
<p>Place MNSTKM10 on LSTKM1018.</p> 	<p>Set the rear in the slot and push the assembly forward.</p> 
<p>Unlock the side rig of MSUB18 and lock with the latches of LSTKM1018.</p> 	<p>Place GEOM10 and adjust the angle with the LinkBar.</p> 

- With MSUB15

- Place 2x LSTKM1018 on MSUB18.
- LSTKM1018: OUTWARDS for MSUB15 Stacking.
- Unlock the side Rig and lock with the latches of LSTKM1018.

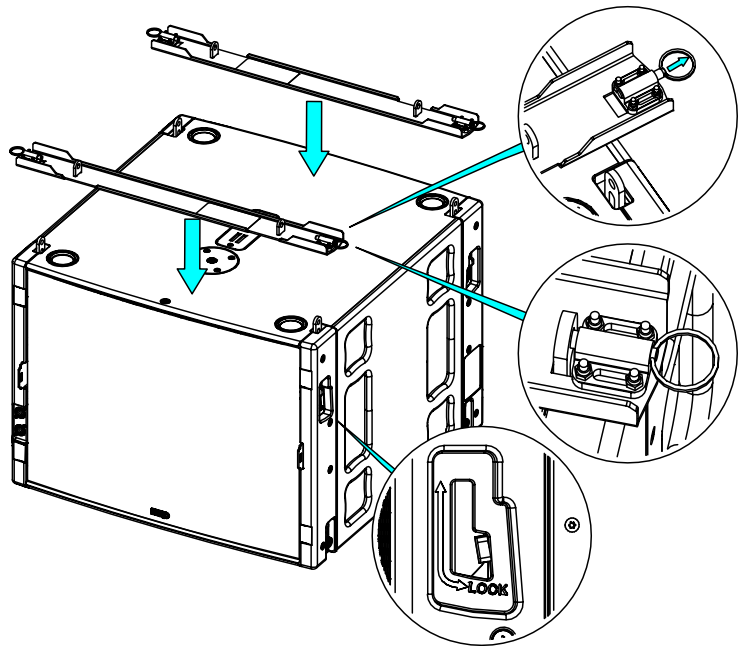

- Place the MSUB15.
- Lock MSUB15 on LSTKM1018 with the latches of MSUB15.

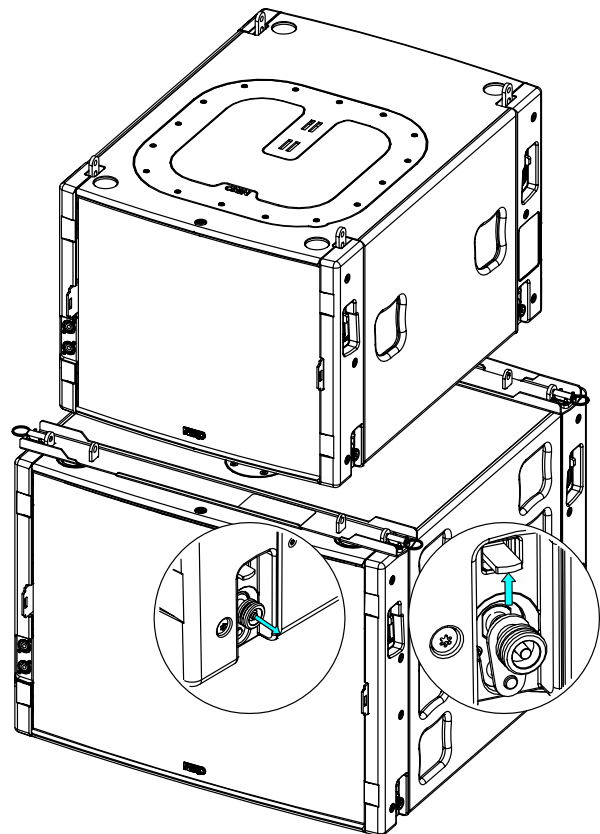

NEXO

nexo-sa.com
ZA du Pre de la Dame Jeanne
60128 PLAILLY - France


- Read this document before using.
- Keep this document.
- Observe all warnings and cautions.



- With VNT-BUMPM10 (6x GEOM10 max)



WARNING : It's mandatory to use VNT-GSTKM10M12L or S

- Place 2x LSTKM1018 on MSUB18.
- LSTKM1018: OUTWARDS for GEOM10 Stacking.
- Unlock the side Rig and lock with the latches of LSTKM1018.

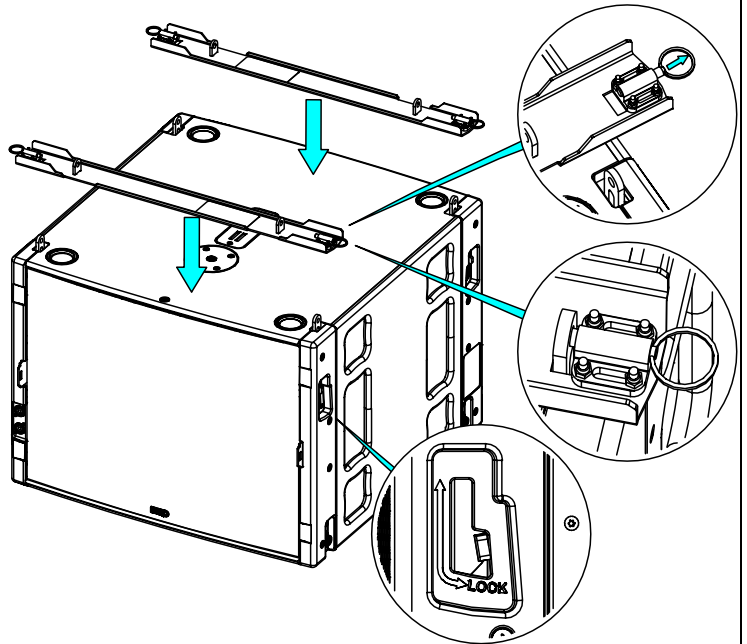

- Place the VNT-BUMPM10.
- Lock with the quick release pins.

- Place the first GEOM10.

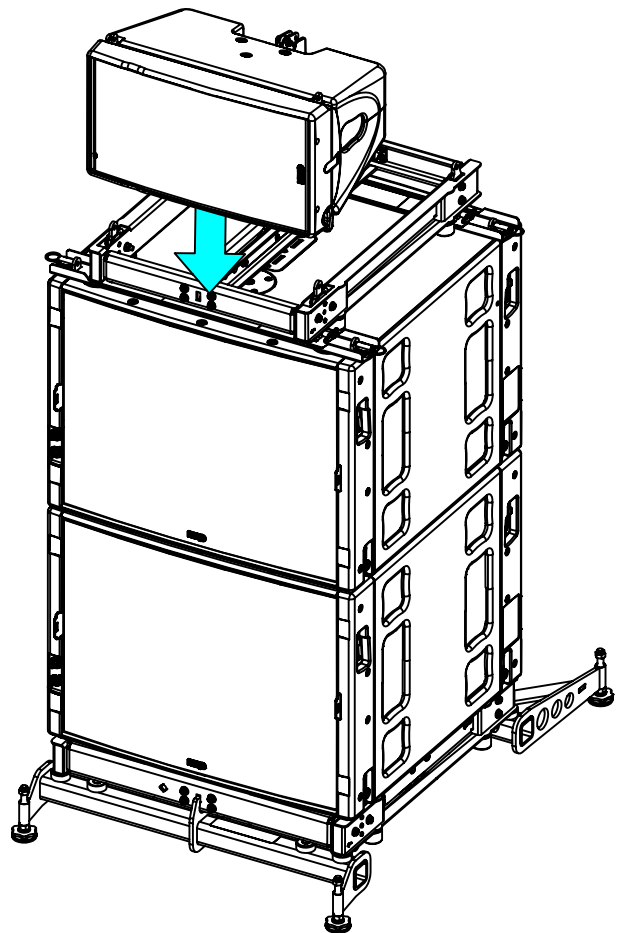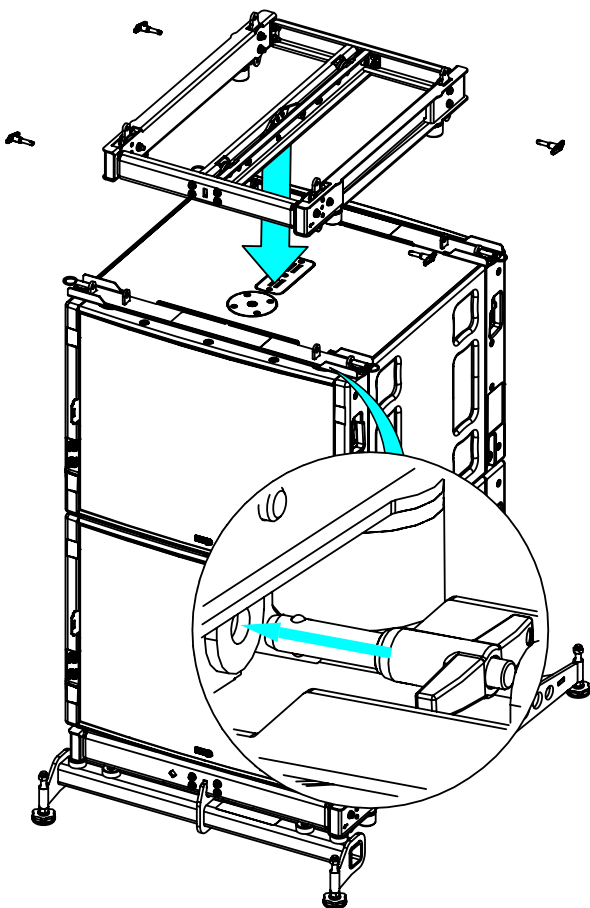

- NEXO cannot accept responsibility for accidents caused by any factor other than defects in this product itself.
- Please check the web site nexo-sa.com for the latest update.

NEXO

nexo-sa.com
ZA du Pre de la Dame Jeanne
60128 PLAILLY - France

- Read this document before using.
- Keep this document.
- Observe all warnings and cautions.

